Shot Box - Ref. SB-80




Cost Effective Solution to easily control the Presets on LiveCore™ and Midra™ series







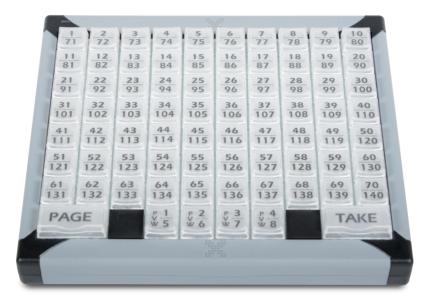







Shot Box at a glance

- ▶ 76 function-labeled keys
- ► Addressable blue and red backlighting
- ▶ Instantly usable for **LiveCore™** series (External Software supplied)
- ▶ Instantly usable for Midra™ series (Direct control from the RCS² software)
- ▶ USB connection to PC or Mac


Key features

- **▶** User Controls
 - 70 keys for the master presets or for the screen presets (140 presets available for **LiveCore**[™] series/up to 64 presets available for **Midra**[™] series)
 - 4 keys for the Customizable Monitoring/Preview (8 presets available: LiveCore™ series only)
 - 1 large key for the Page selection (LiveCore™ series only)
 - 1 large key for the Take button

▶ Connectors

1 USB connector

LiveCore™ series Ascender 32 Ascender 48 SmartMatriX Ultra NeXtage 16 Etherne SB-80 Setup App Mac



To Control the following Switchers

LiveCore[™] series

- ASC4806: Ascender 48
- ► ASC3204: Ascender 32
- ► SMX12x4: SmartMatriX Ultra

▶ D 7.25"x W 8.25" x H 0.94"

NXT1604: NeXtage 16

Dimensions:

Weight:

▶ 0,726 kg

▶ 1.6 lbs

Midra[™] series

- ► PLS350-3G: Pulse² ► EKS550: Eikos²
- ► SPX450: Saphyr ► QMX150: QuickMatriX
 - ► QVU150: QuickVu
- ▶ PLS350: Pulse² ► QVU150-3G: QuickVu

NOTE

Connect the Shot Box USB cable directly to your computer - Do not connect the Shot Box USB cable on the front of your LiveCore™ series or your **Midra**[™] series device.



► SMX250: SmartMatriX²

- ▶ 1 x Carrying case
- ▶ 1 x USB stick containing both the Windows and MAC OS X setup applications*
- ▶ 1 x Quick Start Guide*

Warrantv:

1-year warranty on parts and labor back to factory.



* The quick start guide and the application are also available on www.analogway.com

(i) Specifications subject to change without prior notice

All technical specifications are available on our website









▶ D 184 mm x W 210 mm x H 240 mm





