



Bigeye G-629 Cool



Description

Cooled 6 Megapixel full frame CCD camera

The Bigeye G-629B Cool is a cooled CCD camera with 6 Megapixels resolution and a sensitive full frame sensor. This camera is optimal for applications with low-light conditions requiring long exposure times.


The camera can operate with its internal long life electromechanical shutter or with external impulse light sources and constantly opened shutter.

- Truesense (Kodak) KAF 6303E sensor, 3072 x 2048 pixels
- Cooled to +5 °C (stabilized)
- Quantum efficiency @530 nm: 49%
- Exposure time up to 4292 s (\approx 71 min)
- Multi-functional, user-configurable I/O interface
- GigE Vision
- Reliable operation under rough industrial conditions

Specifications

Bigeye		G-629 Cool	
Interface		IEEE 802.3 1000baseT	
Resolution		3072 x 2048	
Sensor		Kodak KAF-6303E	
Sensor type		CCD Progressive	
Sensor size		Type 35 mm	
Cell size		9.0 x 9.0 μ m	
Cooling temperature		+5 °C	
Dark noise		21 e-	
Dark current		0.008 e-/pixel/s	
Saturation capacity		56000 e-	
Dynamic range		69 dB	
Lens mount		F-Mount	
Max frame rate at full resolution		0.67 fps	
A/D		14 bit	
On-board FIFO		32 MB	
Output			
Bit depth		14 bit	
Mono modes		Mono8, Mono12, Mono12Packed, Mono14	
General purpose inputs/outputs (GPIOs)			
TTL I/Os		1/1	
Opto-coupled I/Os		3/3	
RS-232		2	
Operating conditions/Dimensions			
Operating temperature		0 °C ... 35 °C	
Power consumption (12 V)		max. <37.2 W, typ. <18 W	
Mass		1390 g	
Body Dimensions (L x W x H in mm)		131.55 x 90 x 109 incl. connectors, w/o lens	
Regulations		CE, RoHS (2002/95/EC)	

[Download technical drawing \(click here\)](#)

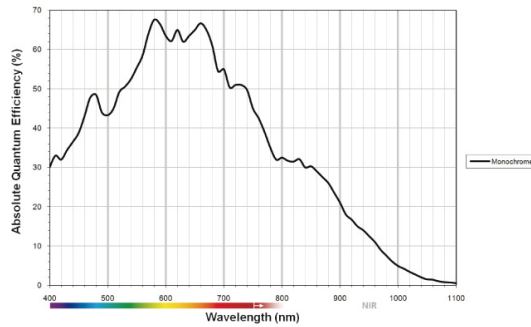

Smart features

- Gain (6 dB)
- Exposure time 50688 μ s to \approx 71 minutes
- Binning (2x1, 2x2)
- Gamma (0.45, 0.5, 0.7)
- Three look-up tables (LUTs)
- Five storable user sets

Easy integration

The Bigeye G-629B Cool can be easily integrated into your application, since it is GigE Vision compliant and compatible with AVT's GigE SDKs. Additionally, this camera can be used with numerous third-party software solutions.

Applications

The Bigeye G-629B Cool is a low-noise CCD camera with a very high dynamic range. It is best suited for applications with the highest demands on image quality. Due to the Peltier cooling, the camera is ideal for image acquisition with long exposure times.

Typical applications:

- Low-noise imaging (industrial and scientific imaging)
- Image acquisition with long exposure times
- Microscopy with high resolution
- Fluorescence microscopy
- Gel electrophoresis, DNA documentation
- Non-destructive evaluation of photosensitive objects
- Astronomy