



## Marlin F-046

### Description

#### Compact, flexible, modular IEEE 1394 Wide VGA C-Mount camera



The Marlin F-046B/C is equipped with a very sensitive Sony CCD sensor. It runs at 52.71 fps (full resolution, Format\_7). Higher frame rates can be reached by a smaller AOI and binning.

- Sony ICX415 (removable IR cut filter)
- Trigger
  - Edge mode, trigger level control, single trigger, bulk trigger, programmable trigger delay
- Options
  - Various IR cut/pass filters
  - CS-Mount
  - Angled head
  - Lateral cable exit
  - White medical housing

## Specifications

<b>Marlin</b>		<b>F-046</b>	
<b>Interface</b>	IEEE 1394a - 400 Mb/s, 1 port		
<b>Resolution</b>	780 x 582		
<b>Sensor</b>	Sony ICX415		
<b>Type</b>	CCD Progressive		
<b>Sensor Size</b>	Type 1/2		
<b>Cell size</b>	8.3 $\mu$ m		
<b>Lens mount</b>	C		
<b>Max frame rate at full resolution</b>	52 fps		
<b>A/D</b>	12 bit		
<b>On-board FIFO</b>	8 MB		
<b>Output</b>			
<b>Bit depth</b>	8-10 bit		
<b>Mono modes</b>	Mono8, Mono16		
<b>Color modes YUV</b>	YUV411, YUV422		
<b>Color modes RGB</b>	RGB8		
<b>Raw modes</b>	Raw8		
<b>General purpose inputs/outputs (GPIOs)</b>			
<b>TTL I/Os</b>	0		
<b>Opto-coupled I/Os</b>	2 inputs, 2 outputs		
<b>RS-232</b>	1		
<b>Power/Mass/Dimensions/Regulations</b>			
<b>Power requirements (DC)</b>	8 V - 36 V		
<b>Power consumption (12 V)</b>	<3 W		
<b>Mass</b>	<120 g		
<b>Body Dimensions (L x W x H in mm)</b>	72 x 44x 29 mm including connectors, w/o tripod and lens		
<b>Regulations</b>	CE, FCC Class B, RoHS		

[Download Marlin technical drawing \(click here\)](#)

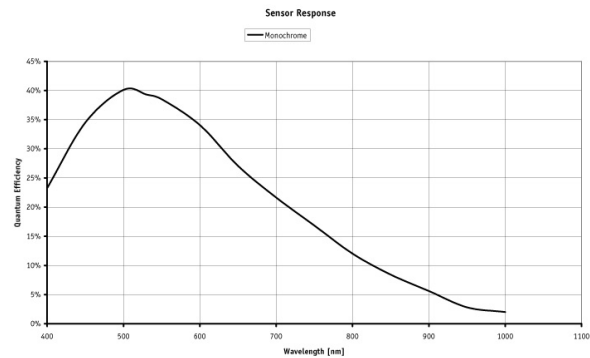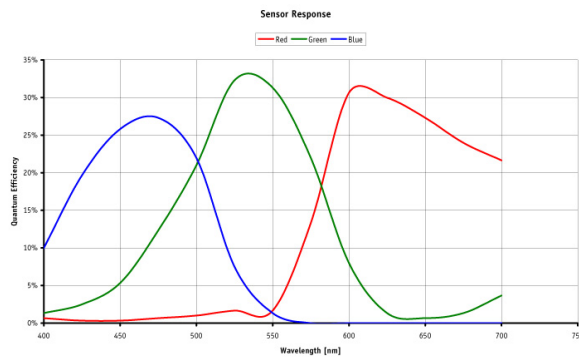

## Smart features

Marlin cameras are equipped with many useful real-time image pre-processing functions. They are performed by the FPGA inside the camera - with no additional CPU load on the host, so that an inexpensive system is sufficient.

- Programmable LUT, white balance, hue, saturation
- Debayering
- Gain
  - Auto/manual
  - Manual gain control: 0 - 24 dB
- Exposure
  - Auto/manual
  - Exposure time: 32  $\mu$ s - 67 s
- Color correction
- Shading correction
- Sub-sampling, 2x binning (b/w)
- AOI (with speed increase)
- Sequence mode - changes the image settings on the fly
- Image mirror
- Deferred image transport
- SIS (secure image signature, time stamp for trigger, frame count etc.)
- Storable user settings

## Applications

With its modular and flexible design and the real-time pre-processing functions, this Marlin camera fits for many applications:

- Machine vision
- Quality control
- Semiconductor inspection
- Industrial inspection
- ... and many more

### Application Case Study:

- **Mass and Class**

Industrial Inspection: Even for small mass-produced parts, it is worth it to use industrial image-processing systems to guarantee first-class quality. At NP Plastics, small plastic rollers for document binders are checked 600 times per minute in three dimensions.