



Pike F-145

Description

1394b camera with Sony ICX285 sensor - 30 fps

The Pike F-145B/C is equipped with one of the finest sensors, Sony's ExView HAD CCD ICX285. Furthermore, various real-time pre-processing functions enhance its exceptional image quality. At full resolution, it runs 30 fps. Higher frame rates can be reached by a smaller AOI, binning (b/w), or sub-sampling.



- Sony ICX285
- Trigger
 - Programmable, trigger level control, single trigger, bulk trigger, programmable trigger delay
- Options
 - 1394b connectors: daisy chain copper or copper and GOF
 - Various IR cut/pass filters
 - F/M39-Mount
 - Hirose power: out
 - Angled head
 - White medical housing

Also available: **Pike F-145B/C (-15fps) version** - lower framerate, enhanced image quality

Specifications

Pike		F-145	
Interface	IEEE 1394b - 800 Mb/s, 2 ports, daisy chain, fiber optic (GOF) optional		
Resolution	1388 x 1038		
Sensor	Sony ICX285		
Type	CCD Progressive		
Sensor Size	Type 2/3		
Cell size	6.45 µm		
Lens mount	C		
Max frame rate at full resolution	30 fps		
A/D	14 bit		
On-board FIFO	64 MB		
Output			
Bit depth	8-14 bit		
Mono modes	Mono8, Mono12, Mono16		
Color modes YUV	YUV411, YUV422		
Color modes RGB	RGB8		
Raw modes	Raw8, Raw12, Raw16		
General purpose inputs/outputs (GPIOs)			
TTL I/Os	0		
Opto-coupled I/Os	2 inputs, 4 outputs		
RS-232	1		
Power/Mass/Dimensions/Regulations			
Power requirements (DC)	8 V - 36 V		
Power consumption (12 V)	4 W		
Mass	250 g		
Body Dimensions (L x W x H in mm)	96.8 x 44 x 44 mm including connectors, w/o tripod and lens		
Regulations	CE, FCC Class B, RoHS		

[Pike technical drawing \(C-Mount\)](#)

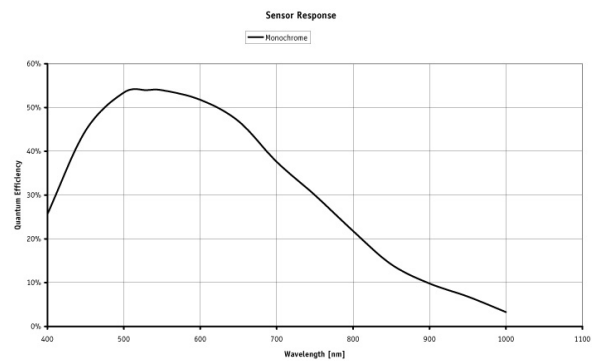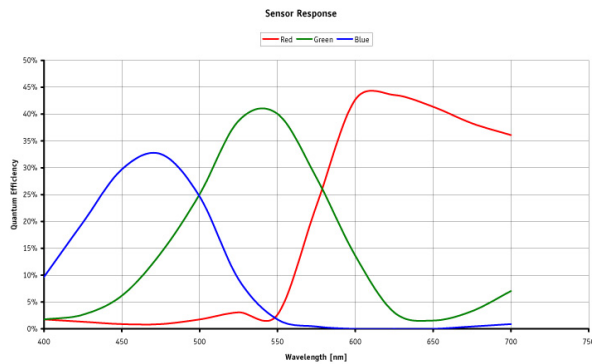

Smart features

- Programmable LUT, white balance, hue, saturation
- Debayering
- Gain
 - Auto/manual
 - Manual gain control: 0 - 32 dB
- Exposure
 - Auto/manual
 - Exposure time: 39 μ s - 67 s
- Color correction
- Shading correction
- High SNR mode (up to 24 dB better signal-to-noise ratio)
- Smear reduction
- Sub-sampling, 2x - 8x binning (b/w)
- Separate AOI for auto features
- Sequence mode (changes the image settings on the fly)
- Image mirror
- Deferred image transport
- SIS (secure image signature, time stamp for trigger, frame count etc.)
- Storable user settings

Applications

The well-engineered sensor Sony ICX285 in combination with the diverse image pre-processing functions and the modular design of the Pike F-145B/C result in a camera with an exceptional high performance. It is the perfect choice for sophisticated applications, especially with low light.

The Pike F-145B/C is especially suited for:

- Applications which require the highest image quality even with low light
- OEM applications (modular concept)
- Motion studies
- 3D recordings of still and moving objects
- Science and research
- Healthcare and sports
- Multimedia and entertainment
- Long cable lengths, 400 meters and more (fiber version)