

## GC750



### Description

#### Low cost Gigabit Ethernet camera - 60 fps


The GC750 is an ultra-compact, economically priced, machine vision camera with Gigabit Ethernet interface (GigE Vision®). The GC750 runs 60 frames per second at 752x480 resolution over the GigE Vision-compliant Gigabit Ethernet interface.

- 60 fps at 752x480
- 1/3" CMOS sensor with 6.0 um square pixels
- CS-mount
- ultra-compact: 33x46x45mm including connectors, w/o tripod and lens
- **Models:**
  - GC750, 752x480, 60 fps, CMOS, mono
  - GC750C, 752x480, 60 fps, CMOS, color

## Specifications

<b>Prosilica GC</b>		<b>750</b>
<b>Interface</b>	IEEE 802.3 1000baseT	
<b>Resolution</b>	752 x 480	
<b>Sensor</b>	Micron MT9V022	
<b>Type</b>	CMOS Progressive	
<b>Sensor Size</b>	Type 1/3	
<b>Cell size</b>	6 µm	
<b>Lens mount</b>	CS	
<b>Max frame rate at full resolution</b>	60 fps	
<b>A/D</b>	10 bit	
<b>On-board FIFO</b>	16 MB	
<b>Output</b>		
<b>Bit depth</b>	8/10 bit	
<b>Mono modes</b>	Mono8, Mono12, Mono16	
<b>Color modes YUV</b>	YUV411, YUV422, YUV444	
<b>Color modes RGB</b>	RGB24, BGR24, RGBA24, BGRA24	
<b>Raw modes</b>	Bayer8, Bayer12, Bayer16	
<b>General purpose inputs/outputs (GPIOs)</b>		
<b>TTL I/Os</b>	1 input, 1 output	
<b>Opto-coupled I/Os</b>	1 input, 1 output	
<b>RS-232</b>	1	
<b>Power/Mass/Dimensions/Regulations</b>		
<b>Power requirements (DC)</b>	12 V	
<b>Power consumption (12 V)</b>	2.2 W	
<b>Mass</b>	85 g	
<b>Body Dimensions (L x W x H in mm)</b>	45x46x33 including connectors, w/o tripod and lens	
<b>Regulations</b>	CE, FCC, Class A, RoHS	

[Download Prosilica GC750 technical drawing \(click here\)](#)

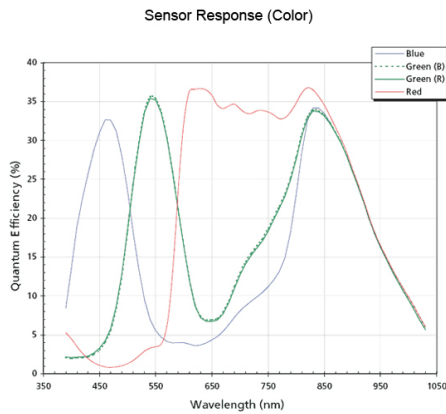

## Smart features

The GC750 features include:

- Auto Exposure
- Auto Gain
- Auto White balance
- Flexible Binning
- Region of Interest readout (AOI partial scan)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Global shutter (digital shutter)
- Recorder and Multiframe Acquisition Modes

## Applications

The CMOS sensor is suitable for applications where excellent near-IR sensitivity and resistance to blooming are required. These include:

- high-speed inspection
- machine vision
- optical character recognition
- traffic imaging
- robotics
- OEM applications

### Application Case Study:

- **Here Comes The Sun**

Science & Research: Solar power plant uses GigE cameras for mirror alignment.