


Specifications

Prosilica GX		3300	
Interface	IEEE 802.3 1000baseT		
Resolution	3296 x 2472		
Sensor	Kodak KAI-08050		
Type	CCD Progressive		
Sensor Size	Type 4/3		
Cell size	5.5 µm		
Lens mount	F		
Max frame rate at full resolution	17 fps		
A/D	14 bit		
On-board FIFO	128 MB		
Output			
Bit depth	8/14 (mono) - 8/12 (color) bit		
Mono modes	Mono8, Mono12, Mono16		
Color modes YUV	YUV411, YUV422, YUV444		
Color modes RGB	RGB24, BGR24, RGBA24, BGRA24		
Raw modes	Bayer8, Bayer12, Bayer16		
General purpose inputs/outputs (GPIOs)			
TTL I/Os	0		
Opto-coupled I/Os	2 inputs, 4 outputs		
RS-232	1		
Power/Mass/Dimensions/Regulations			
Power requirements (DC)	5V - 24V		
Power consumption (12 V)	6.1 W (1 port) - 7.2 W (2 ports)		
Mass	365 g		
Body Dimensions (L x W x H in mm)	136.7 x 59.7 x 59.7 (including connectors, w/o tripod and lens)		
Regulations	CE, FCC, Class A, RoHS		

[Download Prosilica GX3300 technical drawing \(click here\)](#)

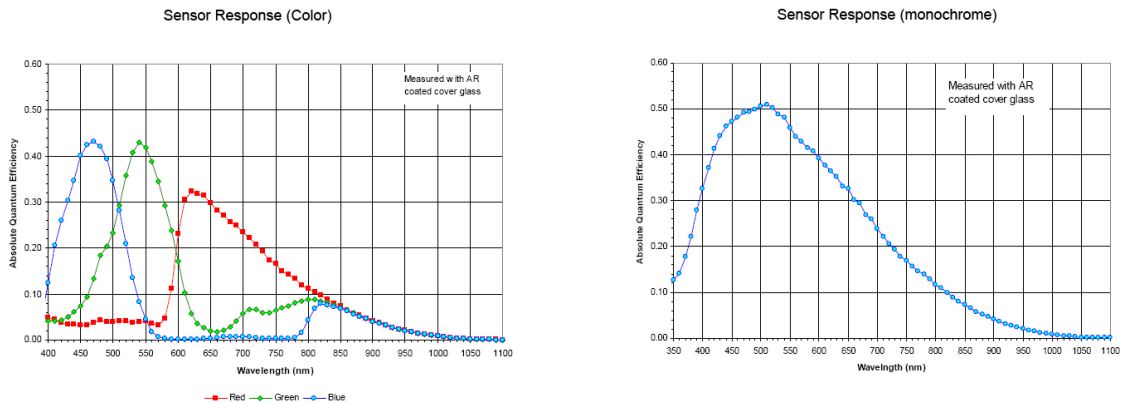

Smart features

The Prosilica GX3300 features include:

- Auto Exposure
- Auto Gain
- Auto White balance
- Flexible Binning
- Region of Interest readout (AOI partial scan)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Global shutter (digital shutter)
- Recorder and Multiframe Acquisition Modes

White Papers & Application Notes:

[Prosilica GX Image Height Vs. Frame Rate \(PDF - 241 KB\)](#)

[Integrating Motorized Lenses with Prosilica GX Cameras \(PDF - 461KB\)](#)

[Canon EF Adapter on Prosilica GE and Prosilica GX Cameras \(PDF - 466KB\)](#)

Applications

The 8 Megapixel GX3300 is ideal for a wide range of applications including:

- LCD panel inspection
- high-resolution industrial inspection
- 3-D metrology, general machine vision
- public security
- military surveillance
- traffic imaging (Intelligent Traffic Systems)
- embedded systems
- OEM applications