

Cosmobeam 800/1000W with yoke

Code RC 80F • 100F ■ Black RC 80FB • 100FB

This 800/1000W open-face, tungsten-halogen lantern is a precious instrument for both studio applications and locations where powerful and long-distance illumination is needed but quick and easy to set up.

- The housing is aluminium, a very strong and lightweight material
- Thanks to its special design and treatments, the reflector offers an extremely powerful and bright light output for an exceptional even illumination
- The focusing mechanism for beam variation is smooth and accurate and allows precise light delivery exactly where needed
- The lamp contacts in pure 100% silver represent a unique feature of this lantern which extends the lamp and contacts life reducing maintenance costs
- Top quality switch with very high number of on/off cycles
- All main mechanical components are stainless steel
- The ergonomic knob to fix the tilt position is shaped to ensure ideal handling to quickly and effortlessly fix the tilt position
- A complete set of accessories is available to create effects and control the light
- It is available in kit



ACCESSORIES



RC 103C/R
Four-leaf barndoor with safety mesh and gel clips • gr 650



RC 103C
Four-leaf barndoor with gel clips • gr 625



RC 101
Accessory holder • gr 350



RC 104
Dichroic filter • gr 170



RC 105
Safety glass • gr 170



RC 105A
Diffusion glass • gr 170



RC 106
Scrim set (4 pieces) • gr 150



RC 107
Safety mesh • gr 110 (excludes attachment of any other accessory)



RC 50/55
Snoot diam. 55 mm • gr 200
RC 50/63
Snoot diam. 63 mm • gr 210



RC 108SDM
Soft light box 61x81 cm Silver Dome Medium complete with connector • gr 1400



RC 212B
Aluminium stand 76/264 cm • gr 1120 (as alternative RC 211B, RC 213B)



RC 4170
Clamp with spigot 16 mm • gr 300



RC 4320
Toggle joint with 2 sockets 16 mm • gr 250



RC 4325
Umbrella diam. 80 cm • gr 340

Note: receiving diameter of accessories 162 mm

TECHNICAL DATA


- Aluminium housing
- High-temperature painting
- Sanded and treated aluminium reflector
- Spot/flood focusing through rear knob
- Aluminium yoke mounting with 16 mm (5/8") socket
- Full lamp contacts in pure silver 100%
- 3,5 mt VDE fire resistant silicone cable, section 3x1,5 mmq
- In-line 10A switch protected by high-impact-proof housing
- Cable gland against tear
- Supply voltage 230-240V~
- Lamp base R7s
- Correlated color temperature 3200K
- IP 20
- CE compliant

Weight kg 1,500


Packing dimensions 27 x 21 x h 17 cm



TECHNICAL DRAWINGS

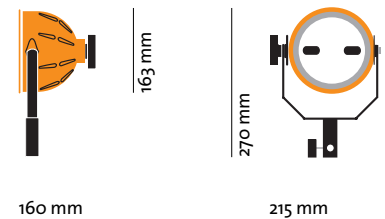



PHOTOMETRIC DATA

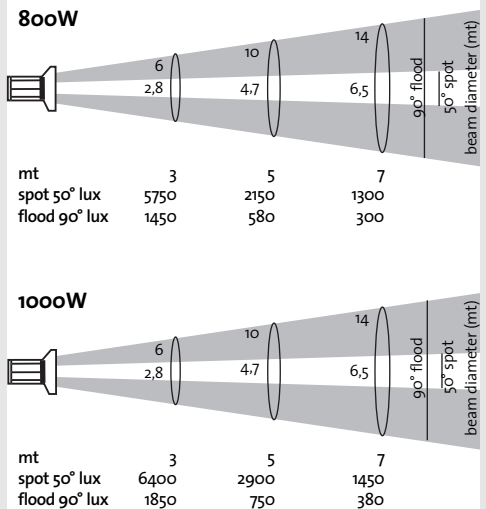

LAMPS

BASE R7s • 3200K

MOD.	LENGTH	WATT	ANSI	LIF
RC 80		800-230V	DXX	P2/13
		800-240V	DXX	P2/13
		650-120V	FAD	
		also available: 600W-500W-250W		
RC 100		1000-230V		P2/35
		1000-240V		P2/35
		1000-120V	DXW	
		also available: 800W- 600W		