



**For Security
Zoom**

D17×7.5B-YN1

Applicable camera (model)

1	2/3	1/2	1/3	1/4
---	-----	-----	-----	-----

17×

New!



ZOOM
Zoom

TELE
Telephoto
Long Focal


MOTOR DRIVE
Motor Drive

DC
DC Auto Iris

C-mt
C Mount
ND
ND Filter

METAL
Metal Mount
F1.6
Wide Aperture Rate

PRESET
Potentio Meter
RoHS
RoHS Compliant

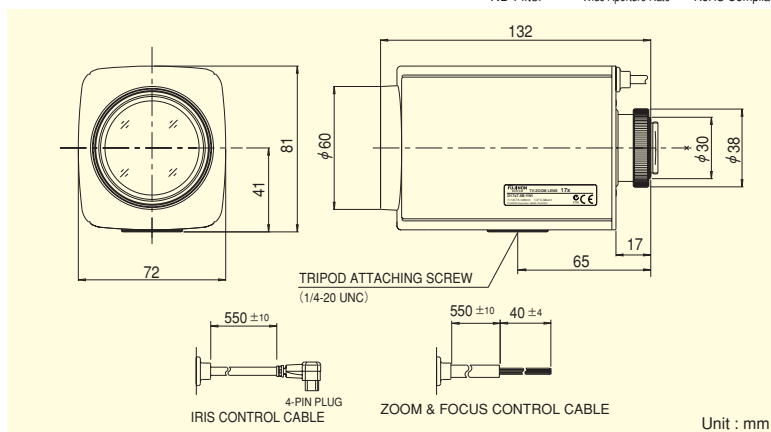

- Cost-effective high standard zoom lens.
- Compact design that fits in a small housing, miniaturizing the overall system.
- Wide aperture of F1.6, best suited for surveillance in dark places.
- Built-in potentiometer, supporting preset.
- Built-in ND filter for T360, supporting high sensitivity cameras.

ZOOM LENSES

Focal Length (mm)			7.5~128 (17×)	
Iris Range			F1.6 ~ T360 (Equivalent to F360)	
Operation	Zoom		Motor Drive (*1)	
	Focus		Motor Drive (*1)	
	Iris		Auto (DC Type) (*2)	
Angle Of View (H×V)	1/2"	WIDE	45°36′ × 34°42′	
		TELE	2°54′ × 2°12′	
	1/3"	WIDE	34°42′ × 26°18′	
		TELE	2°12′ × 1°42′	
	1/4"	WIDE	26°18′ × 19°45′	
		TELE	1°42′ × 1°14′	
Focusing Range (From Front Of The Lens) (m)			∞ ~ 1.5	
Object Dimensions at M.O.D. (H×V) (mm)	1/2"	WIDE	1193 × 893	
		TELE	73 × 55	
	1/3"	WIDE	893 × 668	
		TELE	55 × 42	
	1/4"	WIDE	668 × 500	
		TELE	42 × 31	
Back Focal Distance (in air) (mm)			15.10	
Exit Pupil Position (From Image Plane) (mm)			-80.1	
Filter Thread (mm)			M58 × 0.75	
Mount			C	
Mass (g)			580	
Coil Resistance			Drive Coil 190Ω Damping Coil 1,150Ω	
Current Consumption			23mA (Max.) at DC 4V	
Standard Accessories			Iris Control Cable	
Remarks			• With Metal Mount (*1) Power•Voltage 8V compatible (*2) When power is turned off, iris will automatically close.	

Wiring

