

FUJIFILM
expect INNOVATION™

EXCEED Series

1/3 Inch Digital Servo Telephoto



QuickZoom
Innerfocus

XT20sx4.7BRM

Technology That Inspires...

FUJINON


XT20sx 4.7BRM




LENS	XT20sx4.7 BRM
Zoom Ratio / Format	20X / 1/3"
Focal Length	4.7 ~ 94 mm
Maximum Relative Aperture	1:1.4 (4.7-87.7 mm)
M.O.D. from Front of Lens	0.9 m
Object Dimensions at M.O.D.	4.7mm 901 x 506 mm 47 x 26 mm
Angular Field of View (Hor. x Vert. in °)	4.7 mm 58° 11' x 34° 44' 59 mm 3° 11' x 1° 48'
Filter Size	ø82mm P=0.75
Inner Focus	Yes
Macro	Yes
Size (HxWxL)	ø85 x 189.8 mm
Weight	1.48 kg
Features	QuickZoom, Innerfocus, Digital Servo

ACCESSORIES: HD & SD ENG/EPF PROFESSIONAL REAR CONTROL KITS



MS-01 Manual Focus/Servo Zoom

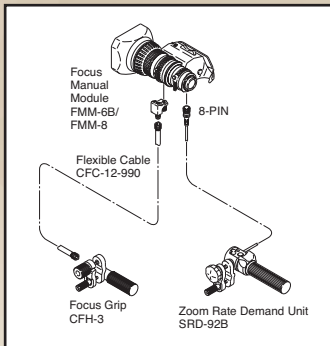

MM-01 Manual Focus/Manual Zoom Not available on S16x7.3

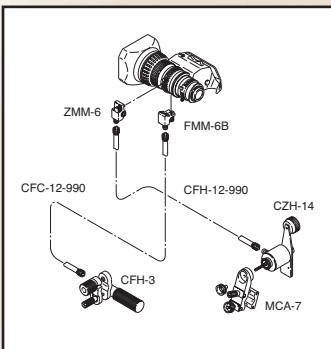

SS-01 Servo Focus/Servo Zoom Not available on S16x7.3

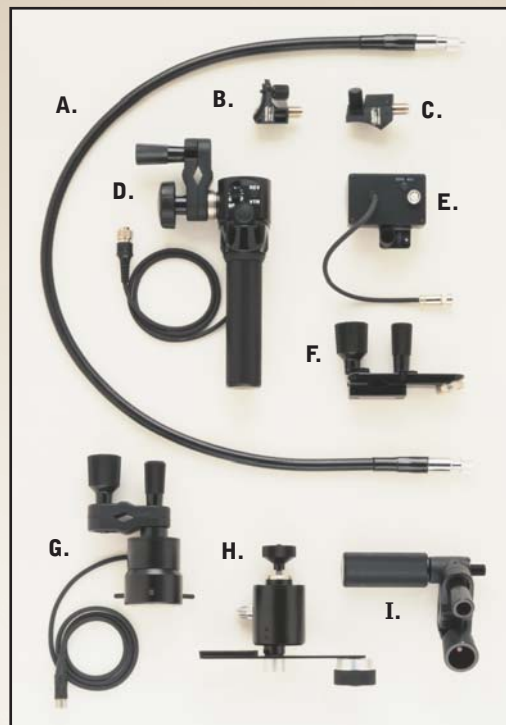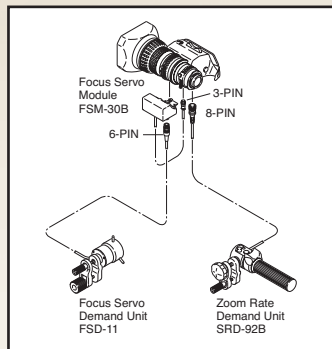

- A. CFC-990 Flex Cable
- B. FMM-6B/FMM-8* Focus Manual Module
- C. ZMM-6 Zoom Manual Module
- D. SRD-92B Zoom Demand
- E. FSM-30B Focus Servo Module
- F. MCA-7 Mounting Clamp
- G. FSD-11 Focus Demand
- H. CZH-14 Zoom Handle
- I. CFH-3 Focus Handle

*Specify camera type.

*FMM-8 for use with S16x7.3

For Sales Contact Information go to
www.Fujinon.com