




**For Security**  
**Fixed Focal**

# YF2.8A-2

Applicable camera (model)



**FIXED**

Fixed Focal

**WIDE**

Wide Angle

**MANUAL**

Manual Iris

**CS-mt**

CS Mount


**F1.3**

Wide Aperture Rate



- Super wide angle lens with the horizontal field angle of 96 degrees or more (when used on 1/3" cameras).
- Compact and lightweight design of 40g, best suited for built-in lenses.
- Wide aperture of F1.3, optimizing the performance at low lighting intensity.

\*Photograph is a similar model.

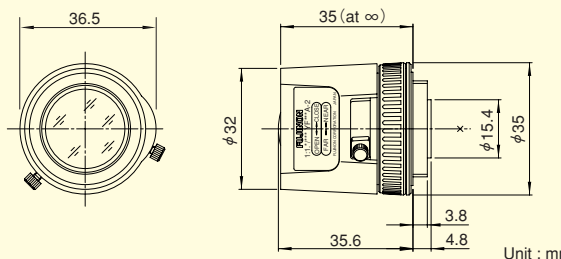

FIXED FOCAL LENGTH LENSES


|                                             |       |                 |
|---------------------------------------------|-------|-----------------|
| Focal Length (mm)                           |       | 2.8             |
| Iris Range                                  |       | F1.3 ~ Close    |
| Operation                                   | Focus | Manual          |
|                                             | Iris  | Manual          |
| Angle Of View (H×V)                         | 1/3"  | 96°15' × 71°51' |
|                                             | 1/4"  | 71°51' × 53°45' |
| Focusing Range (From Front Of The Lens) (m) |       | ∞ ~ 0.1         |
| Object Dimensions at M.O.D. (H×V) (mm)      | 1/3"  | 241 × 157       |
|                                             | 1/4"  | 157 × 110       |
| Back Focal Distance (in air) (mm)           |       | 8.11            |
| Exit Pupil Position (From Image Plane) (mm) |       | 166             |
| Filter Thread (mm)                          |       | —               |
| Mount                                       |       | CS              |
| Mass (g)                                    |       | 40              |
| Remarks                                     |       |                 |



**For Security**  
**Fixed Focal**

# YF4A-2

Applicable camera (model)



**FIXED**

Fixed Focal

**MANUAL**

Manual Iris

**CS-mt**


CS Mount

**F1.2**

Wide Aperture Rate



- Compact and lightweight design of 30g, best suited for built-in lenses.
- Wide aperture of F1.2, optimizing the performance at low lighting intensity.

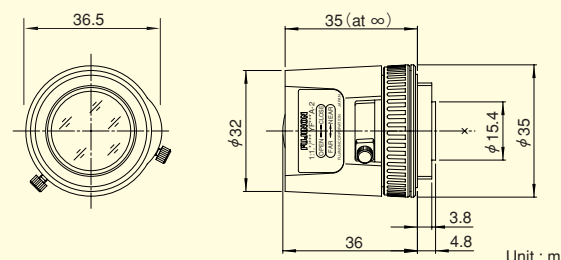

|                                             |       |                 |
|---------------------------------------------|-------|-----------------|
| Focal Length (mm)                           |       | 4               |
| Iris Range                                  |       | F1.2 ~ Close    |
| Operation                                   | Focus | Manual          |
|                                             | Iris  | Manual          |
| Angle Of View (H×V)                         | 1/3"  | 65°21' × 49°27' |
|                                             | 1/4"  | 49°27' × 37°15' |
| Focusing Range (From Front Of The Lens) (m) |       | ∞ ~ 0.1         |
| Object Dimensions at M.O.D. (H×V) (mm)      | 1/3"  | 132 × 99        |
|                                             | 1/4"  | 99 × 73         |
| Back Focal Distance (in air) (mm)           |       | 8.62            |
| Exit Pupil Position (From Image Plane) (mm) |       | 727             |
| Filter Thread (mm)                          |       | —               |
| Mount                                       |       | CS              |
| Mass (g)                                    |       | 30              |
| Remarks                                     |       |                 |