

GENUS PRODUCTS

Matte Boxes
Support Bar Systems
Adaptor Plates
Adaptor Rings & Donuts
French Flags
DSLR Camera Accessories
and more

WARRANTY

Your Genus Wide Angle Mattebox is covered by a
one year warranty from the date of purchase.


Full terms and conditions of warranty can be found on our website

www.genustech.tv


Date of Purchase

Dealer

GWMC - Wide Angle Mattebox

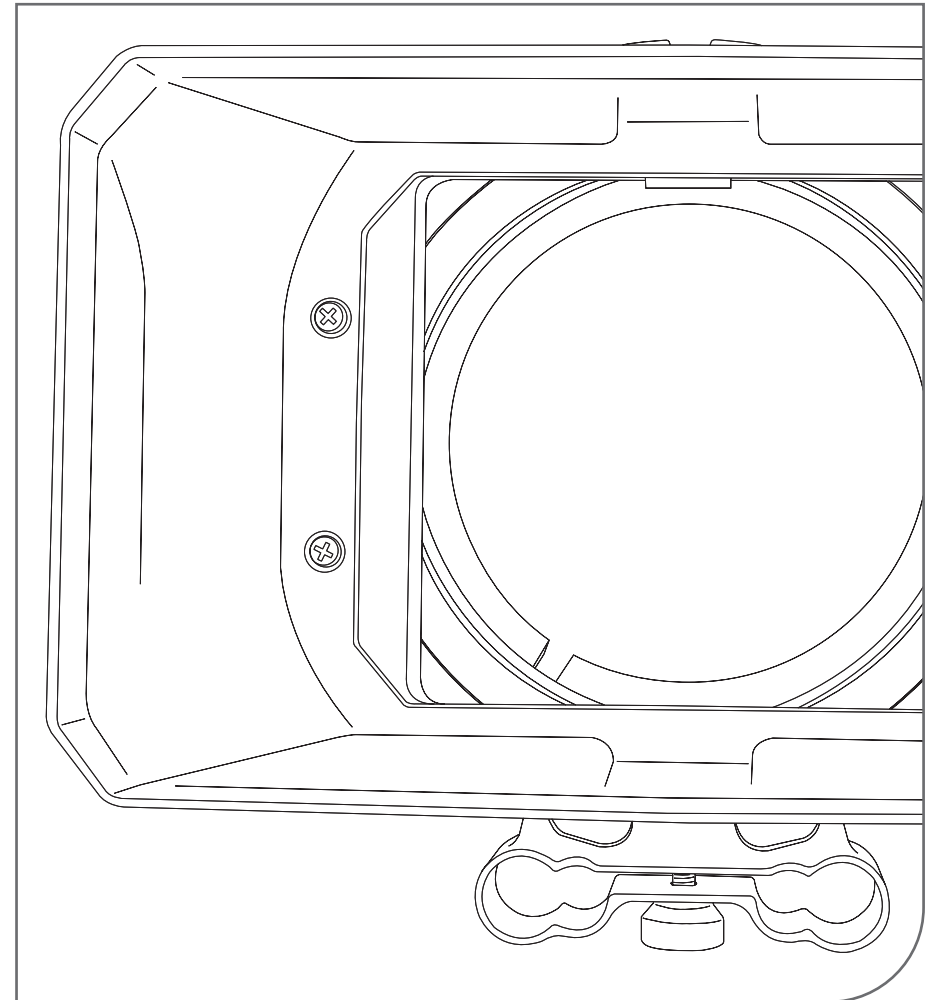


The GWMC wide angle mattebox

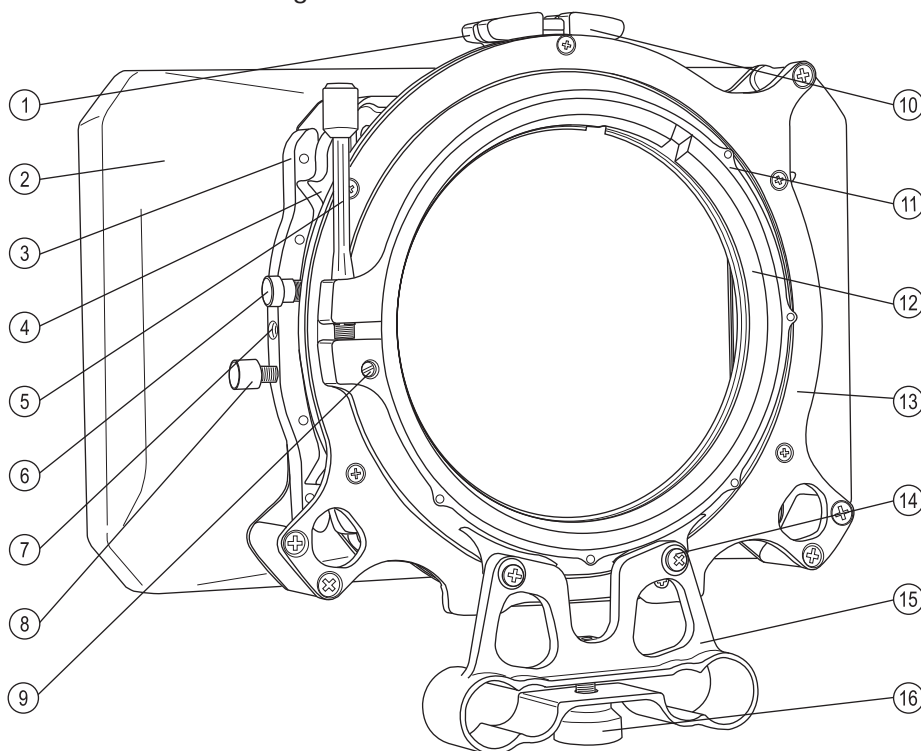


- 1 Filter Tray Black (wide)
- 2 Ray Shade
- 3 Front Filter Tray Rails (fixed)
- 4 Back Filter Tray Rails (rotating)
- 5 Back Clamp Screw
- 6 Tray Lock Screw (back)
- 7 Filter Tray Idents
- 8 Tray Lock Screw (front)

- 9 Back Clamp Ring Ident
- 10 Filter Tray Blue
- 11 Back Clamp Ring
- 12 GARD Do-Nut Adaptor Ring
- 13 Back Plate
- 14 Bar Support Screws
- 15 Bar Support
- 16 Bar Support Lock Off Knob



GARD Do-Nut Adaptor Ring




GAR Step-down Adaptor Ring
(ring size pre-specified)

Instructions

Inserting Filters

- 1 The GWMC matte box comes with two filter trays; one of which can be rotated 360°. To place the filters in the filter holders you need to remove the filter trays from the matte box.
- 2 Place the filter into the filter holder groove at the bottom end of the filter tray first.
- 3 Lift up the top catch (plunger) of the filter tray and allow the filter to position into the top groove and then release the plunger so that the filter is held firmly in place by the wedge plate.
- 4 The blue coloured filter tray denotes the rotating filter and should be used for filters such as Polarizer's and Star Filter's, and is always positioned closest to the lens. Mounting is exactly the same for both trays.
- 5 Slide the filter trays back into the *filter tray rails* in the matte box. The filter holder is held in place by two internal ball bearings, either side of the filter tray. When you reach the centre you will hear an audible click. The filter tray is now in position. You can now lock the filter tray using the retaining thumb-screws, which are located on the left hand side (blue screws). Tension between the *filter tray rails* and the *filter tray* can be adjusted by tightening or loosening the *filter tray idents* on either side of the *filter tray rails* with a flathead screwdriver.
- 6 The Matte Box is supplied with a pre-set tension for the rotation, but if you want to adjust the tension of the rotating filter holder this is simply done by either tightening or loosening the *back clamp ident* with a flathead screwdriver.

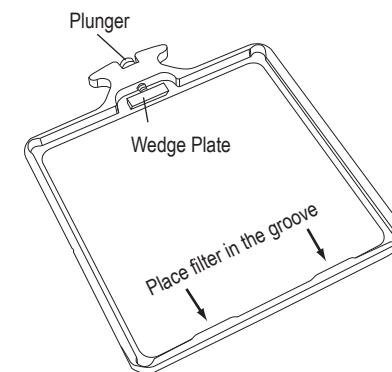

example Filter Tray (Blue)

Attaching the Matte Box to Your Camera

- 1 Take the *GAR step-down adaptor ring*. Remove any lens cap or sunshade from the camcorder lens. Screw the *GAR adaptor ring* onto the thread of the lens. (On your order, you would have specified the correct adaptor ring size for your lens. The goods you would have received will match your order. If this adaptor ring and camcorder lens thread does not match, please contact your supplier immediately).
- 2 The *GARD do-nut adaptor ring* will make a snug fit to the back of the matte box aperture and the adaptor ring. This will ensure there are no light leaks to the lens. The *GARD do-nut adaptor ring* should already be in place inside the matte box. If it is not, please take the *GARD* and place it inside the back of the matte box (matte box should be face down on a flat surface), with the thicker edge of the *GARD* going in first.
- 3 Take the matte box and push it onto the *GAR adaptor ring* (which is now already on your camcorder lens). Please ensure that the matte box is the right way up (where the filter tray handles are at the top).
- 4 Align the matte box until it is in a horizontal plane to the camcorder. Tighten the *back clamp screw*, which fixes the matte box to the *GAR adaptor ring* on the camcorder. The pressure applied is only on the adaptor ring and will cause no damage to the lens.