




6502

4x1:2 S/PDIF Switcher



The **6502** is a high-performance switcher for S/PDIF digital audio signals. The unit takes any one of four inputs, provides reclocking and equalization and distributes the signal to two identical outputs.

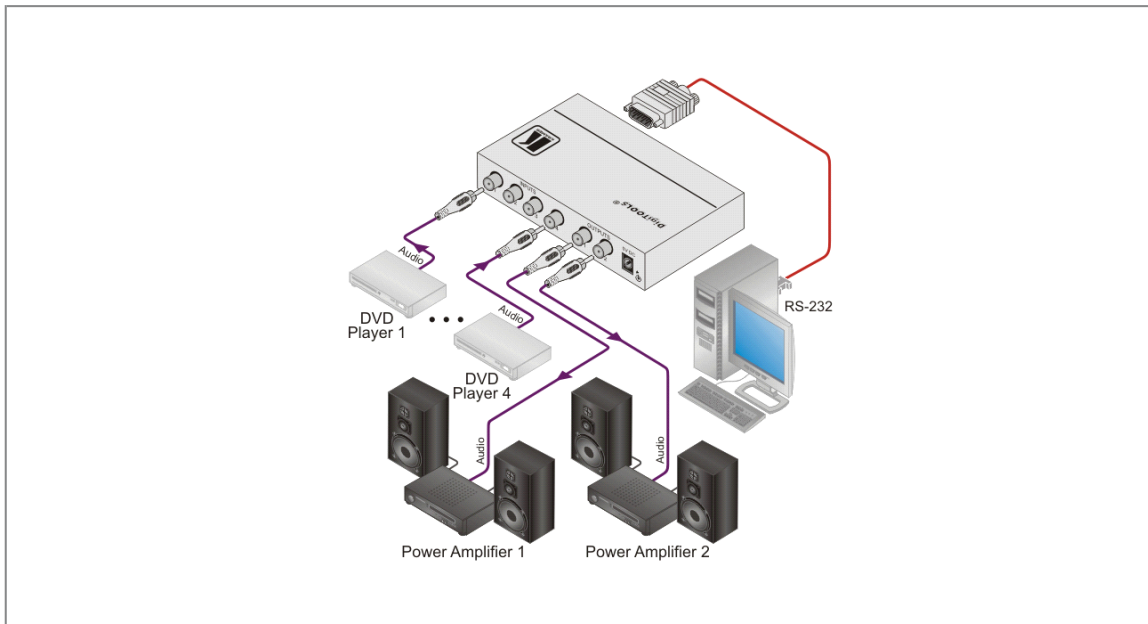



6502

FEATURES

- Inputs - 4 RCA connectors.
- Outputs - 2 RCA connectors.
- Sampling Rates - 32kHz to 192kHz.
- Kramer Equalization & re-Klocking™ Technology - Rebuilds the digital signal to travel longer distances.
- Control - Front panel, RS-232 & IR.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

TECHNICAL SPECIFICATIONS

INPUTS:	4 digital audio S/PDIF on RCA connectors.
OUTPUTS:	2 digital audio S/PDIF on RCA connectors.
SAMPLING RATE:	32kHz to 192kHz.
STANDARDS:	CP1201, IEC 60958, AES3ID and S/PDIF.
DIMENSIONS:	12cm x 6.95cm x 2.44cm (4.72" x 2.74" x 0.96") W, D, H.
POWER SOURCE:	5V DC, 140mA.
WEIGHT:	0.3kg (0.66lbs.) approx.
ACCESSORIES:	Power supply, mounting bracket, IR remote control transmitter.
OPTIONS:	RK-3T 19" rack adapter.