




## 6808HDxI

3G HD-SDI AES De-Embedder



The **6808HDxI** is a high-performance audio de-embedder for 3G HD-SDI signals. The unit can de-embed two selectable AES audio streams.

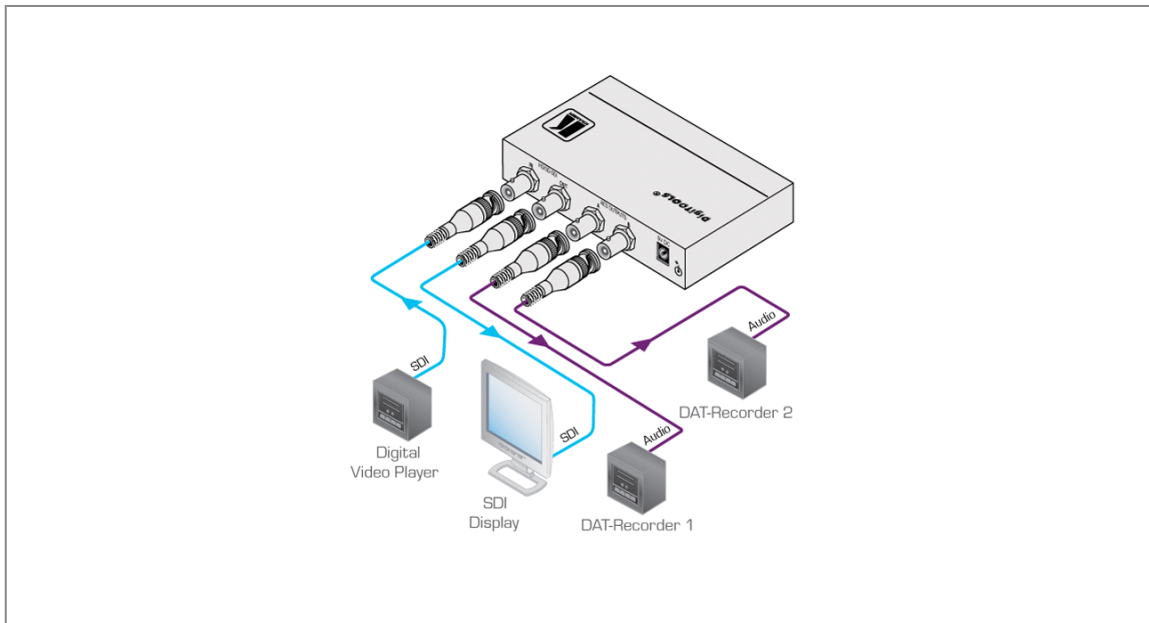



## 6808HDxI

---

### FEATURES

---

- Max. Data Rate - 3Gbps.
- Input - 1 SDI.
- Looping Input
- Outputs - 2 AES-3id.
- Multi-Standard Operation - SDI (SMPTE 259M and SMPTE 344M), HD-SDI (SMPTE 292M) and 3G HD-SDI (SMPTE 424M).
- Kramer Equalization & re-Klocking™ Technology - Rebuilds the digital signal to travel longer distances.
- Group Select DIP-Switches - Select the audio group to de-embed.
- HD-SDI & SDI Input Indication LEDs.
- Compact DigiTOOLS® - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

### TECHNICAL SPECIFICATIONS

---

INPUT:	1 SD/HD/3G HD-SDI.
OUTPUTS:	1 SD/HD/3G HD-SDI, 2 AES/EBU audio on BNC connectors.
POWER SOURCE:	5V DC, 390mA.
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 3.0" x 1.0") W, D, H.
WEIGHT:	0.3kg (0.7lbs).
ACCESSORIES:	Power supply.
OPTIONS:	RK-3T 19" rack adapter.