




## VS-1616D

### 2x2 to 16x16 Modular Multi-Format Digital Matrix Switcher

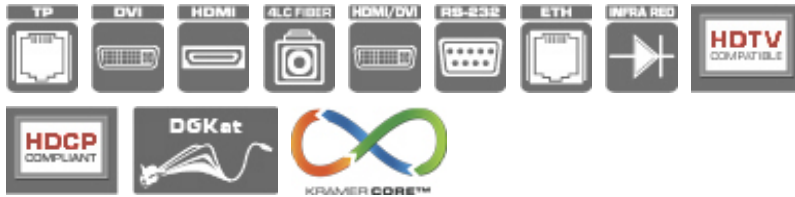

The VS-1616D is a high-performance matrix switcher chassis for DVI & HDMI signals. The unit is modular and populated from 2x2 to 16x16 in increments of two inputs and/or two outputs. The chassis includes a power supply, control module and a test module that can monitor and test any input and output in the matrix.

## FEATURES

- **Kramer Core™ - FLEXIBLE INFRASTRUCTURE CONVERSION!** Copper, Fiber or Twisted Pair – all can be used at the same time, according to input/output module selection. The matrix receives digital signals from compatible Kramer transmitters, automatically converts between available infrastructure options and sends the signals to compatible Kramer receivers. Kramer Core™ solution is the ultimate in versatility!
- **Max. Data Rate** - 3.2Gbps per graphics channel up to 10.4Gbps total.
- **HDTV Compatible.**
- **HDCP Compliant** - With DVI (HDCP) and HDMI modules.
- **DGKat™ Signal Integration** - Kramer's unique technology for converting TMDS as well as control and communication to signals that run over twisted pair cables. We strongly recommend using Kramer DGKat™ cables designed specifically for optimum performance.
- **Kramer Equalization & re-Klocking™ Technology** - Rebuilds the digital signal to travel longer distances.
- **Modular & Easily Configurable Platform** - Input or output module types can be mixed and added in increments of 2 from 2x2 up to 16x16.
- **Available Modules** - DVI, DVI (HDCP), DVI (Dual Link), HDMI, LC Optical & DGKat Twisted Pair (available 2nd quarter 2012).
- **I-EDIDPro™ Kramer Intelligent EDID Processing™** - Intelligent EDID handling & processing algorithm ensures Plug and Play operation for DVI and HDMI systems.
- **Flexible Control Options** - Front panel, IR remote, RS-232 (K-Router™ Windows®-based software is included), Ethernet.
- **Front Panel Lockout.**
- **Take Button** - Executes multiple switches all at once.
- **Memory Locations** - Stores multiple switches as presets to be recalled and executed as needed.

- Test Pattern Module - With 4 output resolutions for troubleshooting video problems.
- Worldwide Power Supply - 100–240V AC.
- Standard 19" Rack Mount Size - 4U. Rack "ears" included.

KRAMER

www.kramerelectronics.com

## VS-1616D

### TECHNICAL SPECIFICATIONS

BANDWIDTH:	Supports up to 3.2Gbps bandwidth per channel (limited by the card installed).
MAX RESOLUTION:	Up to UXGA; 1080p, 1920x1200.
CONTROLS:	Front panel buttons, infrared remote control transmitter, RS-232, Ethernet.
SWITCHING:	Confirm or At Once for immediate switching.
OPERATING TEMPERATURE:	0° to +55°C (32° to 131°F).
STORAGE TEMPERATURE:	-45° to +72°C (-49° to 162°F).
HUMIDITY:	10% to 90%, RHL non-condensing.
POWER SOURCE:	100–240V AC, 50/60Hz, 135VA.
DIMENSIONS:	19" x 14.2" x 4U (W, D, H) rack-mountable.
WEIGHT:	8.1kg (17.9lbs) approx.
ACCESSORIES:	Power cord, infrared remote control transmitter.

