




## TP-112HD

1:2 Computer Graphics Video & HDTV over Twisted Pair Transmitter & Distribution Amplifier



The **TP-112HD** is a twisted pair transmitter for computer graphics video and HDTV signals. It converts a computer graphics video or HDTV signal on a 15-pin HD connector to two identical twisted pair signals.

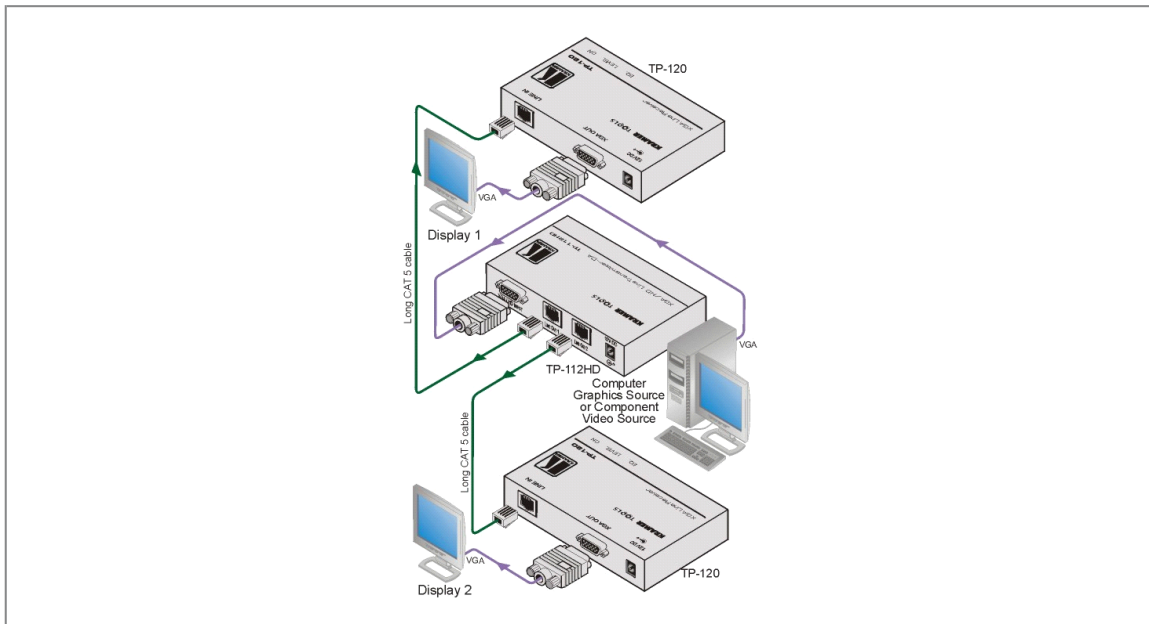



## TP-112HD

---

### FEATURES

---

- **HDTV Compatible.**
- **Max. Resolution - WUXGA & 1080p.**
- **Power Connect™ System** - A single connection to the transmitter or the receiver powers both units when the devices are within 150ft (50m) of each other.
- **Long System Range** - Up to 100m (320ft). Greater distances possible depending on signal resolution and cable.
- **Cable Type** - Uses UTP (unshielded twisted pair) or STP (shielded twisted pair) cable such as CAT 5.
- **Sync Polarity Settings** - H & V switches for improved HDTV compatibility with the CAT 5 outputs.
- **Compact Kramer TOOLS™** - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

### TECHNICAL SPECIFICATIONS

---

INPUT:	1 XGA/HD on a 15-pin HD (F) connector.
OUTPUTS:	2 twisted pair on RJ-45 connectors.
MAX. OUTPUT LEVEL:	1.7Vpp.
MAX. RESOLUTION:	WUXGA & 1080p.
DIFF. GAIN:	4%.
DIFF. PHASE:	0.3Deg.
K-FACTOR:	0.1%.
S/N RATIO:	65dB.
CONTROLS:	2 switches for sync inversion.
COUPLING:	AC.
POWER SOURCE:	12V DC, 522mA.
DIMENSIONS:	12cm x 7.15cm x 2.76cm (4.7" x 2.8" x 1.08") W, D, H.
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-3T 19" rack adapter.