




## VA-10 RGB Cable Delay Corrector



The **VA-10** corrects skew (delay) errors in long RGB or twisted pair cable runs. Individual R, G, and B skew adjustments correct video delay errors in analog and twisted pair applications that cause mis-convergence on the display.

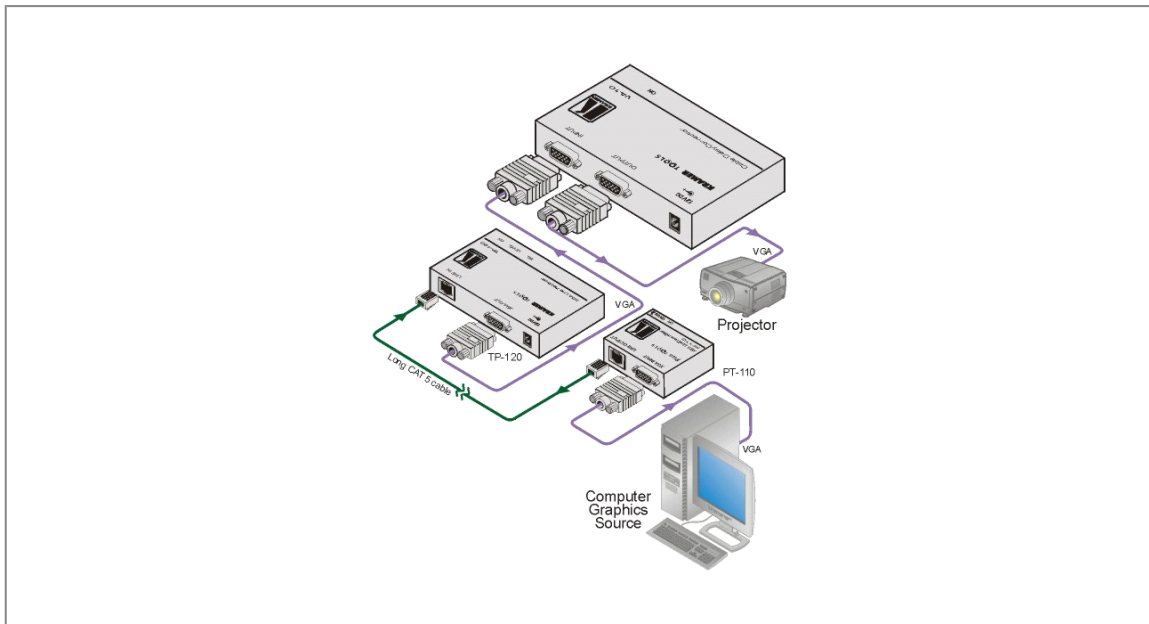



## VA-10

---

### FEATURES

---

- **Input/Output** - 15-pin HD (F) connectors.
- **Control** - R, G, & B delay (skew) adjustments.
- **Compact Kramer TOOLS™** - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

### TECHNICAL SPECIFICATIONS

---

<b>INPUT:</b>	1 analog red, green, blue input signals - 0.7Vpp/75Ω, H & V sync, TTL level, on a 15-pin HD (F) connector.
<b>OUTPUT:</b>	1 analog red, green, blue output signals - 0.7Vpp/75Ω, H & V sync, TTL level, on a 15-pin HD (F) connector.
<b>MAX. OUTPUT LEVEL:</b>	1Vpp.
<b>BANDWIDTH (-3dB):</b>	Up to UXGA.
<b>DIFF. GAIN:</b>	0.8%.
<b>DIFF. PHASE:</b>	0.7Deg.
<b>K-FACTOR:</b>	0.4%.
<b>S/N RATIO:</b>	71dB.
<b>CONTROLS:</b>	Delay control via 3 (RGB) trimmers, 0 to 62ns.
<b>COUPLING:</b>	AC IN and OUT.
<b>POWER SOURCE:</b>	12V DC, 150mA.
<b>DIMENSIONS:</b>	12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98") W, D, H.
<b>WEIGHT:</b>	0.3kg (0.67lbs) approx.
<b>ACCESSORIES:</b>	Power supply, mounting bracket.
<b>OPTIONS:</b>	RK-3T 19" rack adapter.