




VA-8xl

8-Channel Balanced Stereo Volume Controller



The **VA-8xl** is a high-performance 8 channel-balanced stereo input volume controller for balanced audio signals on terminal block connectors. The volume of each L & R stereo channel can be adjusted independently of the other stereo channel.

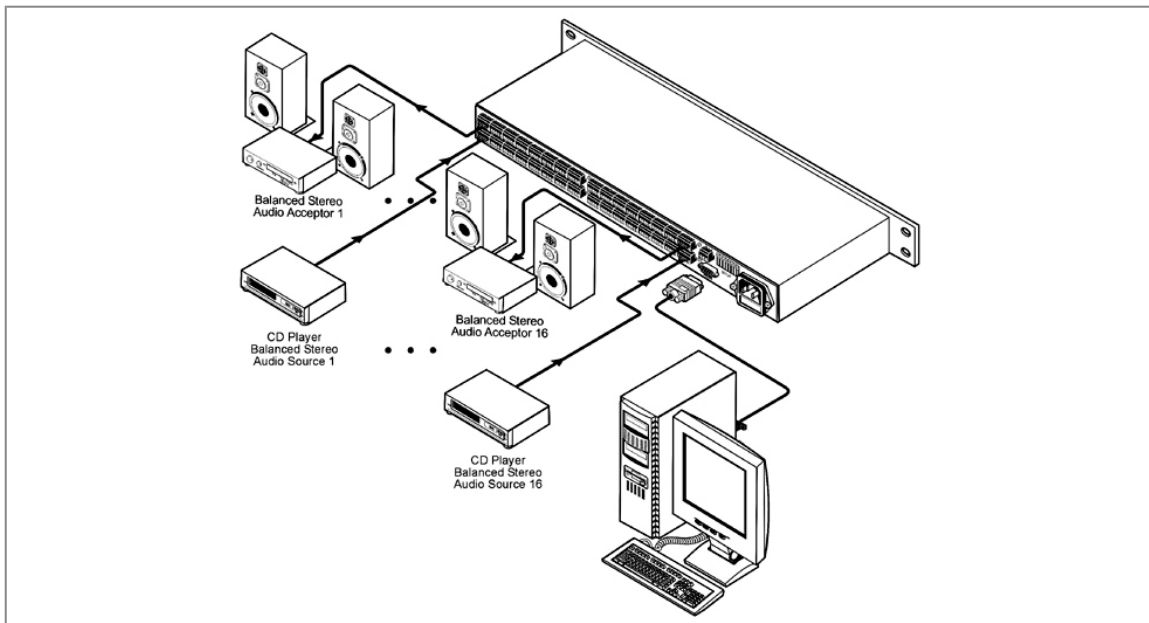



VA-8xl

FEATURES

- Input - 8 balanced stereo.
- Output - 8 balanced stereo.
- S/N Ratio - >90dB.
- Volume - -95dB to +31dB in 0.5dB steps; L& R channels may be controlled separately or together.
- Control - Front panel, RS-232 and RS-485.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U.

TECHNICAL SPECIFICATIONS

| | |
|-----------------------|---|
| INPUT: | 8 balanced stereo audio +4dBu/30k Ω on detachable terminal blocks. |
| OUTPUT: | 8 balanced stereo audio +4dBu/50 Ω on detachable terminal blocks. |
| GAIN: | -95dB to +31dB. |
| MAX. OUTPUT LEVEL: | >20dBu balanced (THD+N <0.01). |
| BANDWIDTH (- 3dB): | 20Hz to 40kHz. |
| NOISE FLOOR: | <90dB (gain 0dB). |
| THD + NOISE: | 0.006% @4dBu 1kHz. |
| CONTROL: | Front pushbuttons, RS-232, and RS-485. |
| INDICATORS: | Gain in dB for left and right channels. |
| POWER SOURCE: | 100-240V, 13VA. |
| DIMENSIONS: | 19" x 7" x 1U W, D, H, rack mountable. |
| WEIGHT: | 3.5kg (7.8lbs) approx. |
| ACCESSORIES: | Power cord, null-modem adapter, Windows®-based Kramer control software. |