

VM-100CB


1:10 Component Video Distribution Amplifier







The VM-100CB is a highperformance distribution amplifier for component video signals. It takes one input, provides correct buffering and isolation, and distributes the signal to ten identical outputs on BNC connectors.

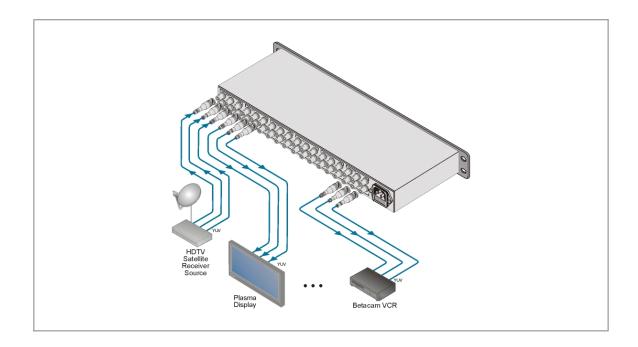



VM-100CB

FEATURES

- High Bandwidth (Y) 450MHz (-3dB).
- HDTV Compatible.
- Level (Gain) and EQ (Peaking) Controls.
- Looping Input.
- Selectable Input Signal Termination.
- Worldwide Power Supply 100-240V AC.
- Standard 19" Rack Mount Size 1U.

TECHNICAL SPECIFICATIONS

INPUT: 1 component video (Y, Pb/Cb,

Pr/Cr), looping on BNC

connectors.

OUTPUTS: 10 component video (Y,

Pb/Cb, Pr/Cr) on BNC

connectors.

MAX. OUTPUT

LEVEL:

2.2Vpp.

BANDWIDTH (- 450MHz.

3dB):

 DIFF. GAIN:
 0.03%.

 DIFF. PHASE:
 0.03Deg.

 K-FACTOR:
 <0.05%.</td>

S/N RATIO: 74dB.

CROSSTALK (all hostile):

CONTROLS: Level: -1dB to +6.4dB; EQ.:

0dB to +7.5dB.

-56dB @5MHz

COUPLING: DC.

POWER SOURCE: 100-240V AC, 50/60Hz; 11VA.

DIMENSIONS: 19" x 7" x 1U W, D, H, rack

mountable.

WEIGHT: 2.7kg (6lbs) approx.

ACCESSORIES: Power cord.