




VM-1110xl

1:10 Balanced Mono Audio Distribution Amplifier



The **VM-1110xl** is a high-performance distribution amplifier for balanced mono audio signals on XLR connectors. It can also be configured as a 1:5 distribution amplifier for stereo balanced audio signals.

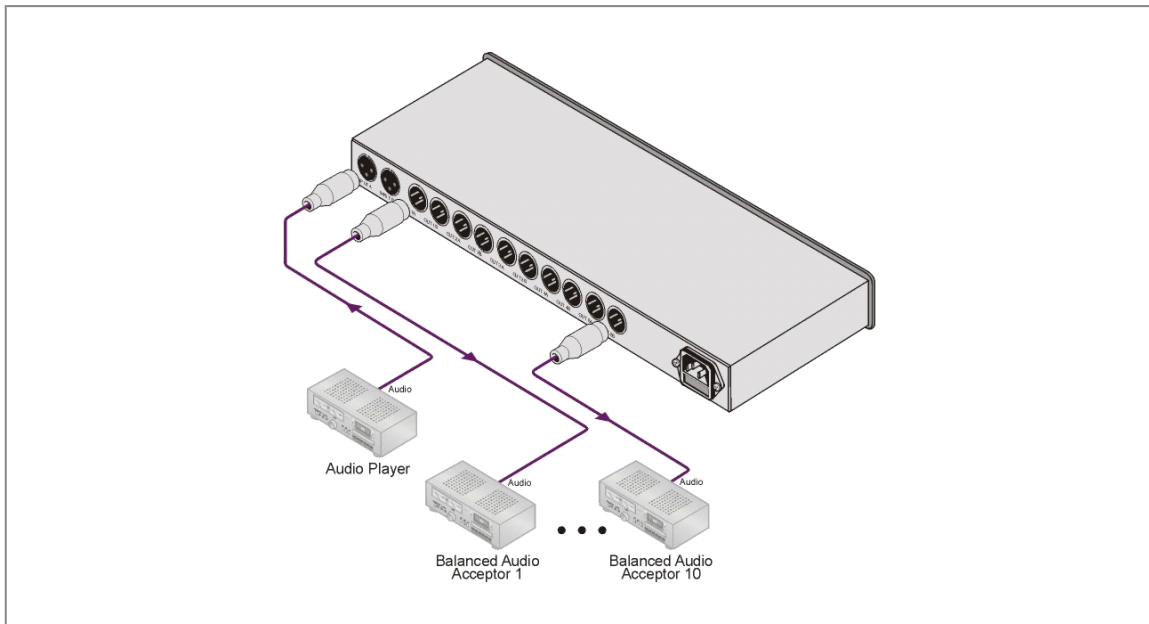



VM-1110xl

FEATURES

- Level (Gain) Controls.
- Dual Mode - Configure as 1:10 (mono) or 1:5 (stereo) DA.
- S/N Ratio - 89.3dB.
- Standard 19" Rack Mount Size - 1U.

TECHNICAL SPECIFICATIONS

| | |
|---------------------|---|
| INPUTS: | 2 balanced stereo audio +4dBu/50kΩ on XLR (F) connectors. |
| OUTPUTS: | 10 balanced stereo audio +4dBu/50Ω on XLR (M) connectors. |
| MAX. OUTPUT LEVEL: | 23.8Vpp. |
| BANDWIDTH (-3dB): | >100kHz. |
| S/N RATIO: | 89.3dB. |
| CROSSTALK: | -78dB. |
| CONTROLS: | Level (x2): -0.7dB to +5.1dB, mode selector switches. |
| COUPLING: | AC (input); DC (output). |
| AUDIO THD + NOISE: | 0.081%. |
| AUDIO 2nd HARMONIC: | 0.006%. |
| POWER SOURCE: | 230V AC, (115V AC USA), 6VA. |
| DIMENSIONS: | 19" x 7" x 1U W, D, H, rack mountable. |
| WEIGHT: | 2.6kg (5.7lbs) approx. |
| ACCESSORIES: | Power cord. |