




VM-3SxI

1:3 s-Video Distribution Amplifier



The Kramer **VM-3SxI** is a high-performance distribution amplifier for s-Video (Y/C) signals. It takes one input, provides correct buffering and isolation, and distributes the signal to three identical outputs.

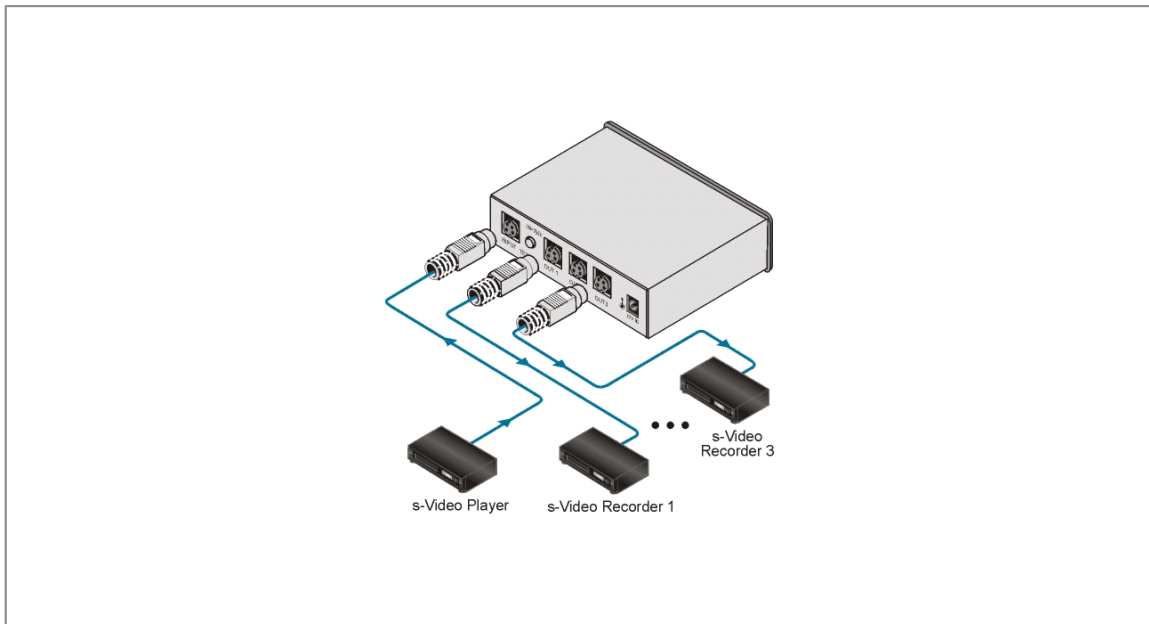



VM-3Sxl

FEATURES

- Bandwidth (Y) - 200MHz (-3dB).
- Selectable Input Signal Termination.
- Desktop Size - Compact size. Three units can be rack mounted side-by-side in a 2U rack space with the optional RK-SM adapter.

TECHNICAL SPECIFICATIONS

| | |
|-----------------------|---|
| INPUT: | 1 s-Video: 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on a 4-pin connector. |
| OUTPUTS: | 3 s-Video: 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4-pin connectors. |
| MAX. VIDEO OUTPUT: | 2Vpp. |
| VIDEO BANDWIDTH | 200MHz (Y). (-3dB): |
| DIFF. GAIN: | 0.03%. |
| DIFF. PHASE: | 0.03Deg. |
| K-FACTOR: | <0.05%. |
| S/N RATIO: | 80dB. |
| CONTROL: | Termination switch. |
| OUTPUT COUPLING: | AC. |
| POWER SOURCE: | 12V DC, 70mA. |
| DIMENSIONS: | 11.7cm x 6cm x 3.2cm (4.6" x 2.4" x 1.3") W, D, H. |
| WEIGHT: | 0.24kg (0.53lbs) approx. |
| ACCESSORIES: | Power supply. |
| OPTIONS: | RK-SM 19" rack adapter. |