


## **VM-50V**

1:5 Composite Video Distribution Amplifier





The VM-50V is a highperformance distribution amplifier for composite or SDI signals. It takes one input, provides correct buffering and isolation, and distributes the signal to five identical outputs.

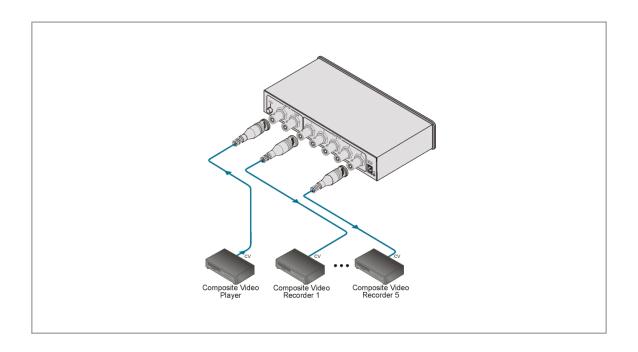



## **VM-50V**

## **FEATURES**

- High Bandwidth 480MHz (-3dB).
- Looping Input.
- Selectable Input Signal Termination.
- Desktop Size Compact size. 2 units can be rack mounted side-by-side in a 1U rack space with the optional RK-1 adapter.

## **TECHNICAL SPECIFICATIONS**

INPUT: 1 video, looping,  $1Vpp/75\Omega$  on

BNC connectors with a termination switch.

OUTPUTS: 5 video,  $1Vpp/75\Omega$  on BNC

connectors.

MAX. VIDEO

OUTPUT:

2Vpp.

480MHz.

VIDEO BANDWIDTH (-

3dB):

DIFF. GAIN: 0.05%.
DIFF. PHASE: 0.12Deg.

K-FACTOR: <0.05%. S/N RATIO: 73dB.

CONTROL:  $75\Omega$  termination switch.

COUPLING: AC.

POWER SOURCE: 12V DC, 40mA.

DIMENSIONS: 16.5cm x 12cm x 4.5cm (6.5" x

4.7" x 2.8") W, D, H.

WEIGHT: 0.62kg (1.4lbs) approx.

ACCESSORIES: Power supply, brackets for

stacking multiple units.

OPTIONS: RK-1 19" rack adapter.