



VP-701xl


Computer Graphics Video & HDTV Scan Converter



Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



The **VP-701xl** is a scan converter for computer graphics video signals. The unit converts computer graphics video signals up to 2048x2048 or HDTV signals up to 1080p to two composite and two s-Video (Y/C) signals simultaneously in either PAL or NTSC formats.

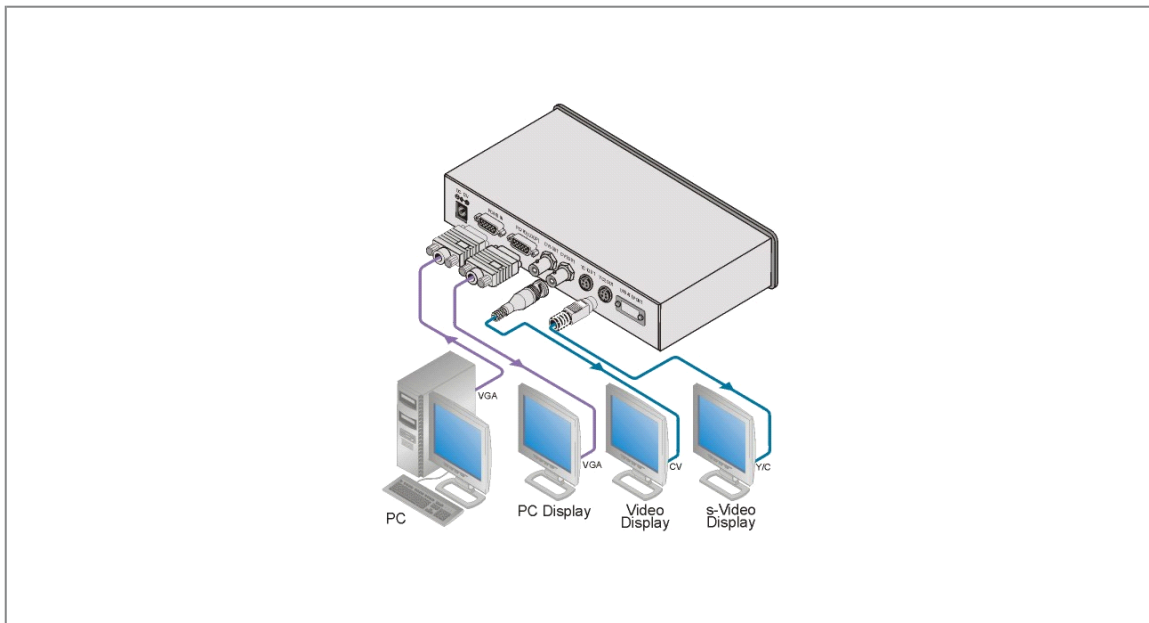



VP-701xl

FEATURES

- **Input** - 15-pin HD for computer graphics or HDTV signals.
- **Output** - 2 CV on BNC connectors, 2 Y/C on 4-pin connectors.
- **Input Compatibility** - Up to 2048x2048 and 1080p.
- **HDTV Compatible.**
- **AutoTrak™ Auto Setup Technology** - One button auto setup that automatically sizes, shifts, and centers any input image on the display device.
- **Multi-Standard Output** - PAL or NTSC (selectable).
- **Looping Input.**
- **Built-In ProcAmp** - Brightness, contrast, color, hue (NTSC only).
- **Flicker Reduction** - 2, 4 or 6-line flicker reduction (selectable).
- **Freeze Frame.**
- **Front Panel Lock Out.**
- **Aspect Ratio** - 3 settings.
- **Zoom & Pan** - To 10x.
- **Control** - RS-232 (for firmware updates) & IR remote (included) with on-screen display.
- **Power Supply** - 12V DC.
- **Desktop Size** - Compact size. Can be rack mounted in a 1U rack space with the optional RK-701xl adapter.

TECHNICAL SPECIFICATIONS

INPUT:	1 computer graphics or component HDTV on a 15 pin HD (F) connector plus loop.
OUTPUT:	NTSC or PAL (selectable); 2 CV on a BNC connector, 2 s-Video on a 4-pin connector.
INPUT RESOLUTION:	Up to 2048x2048 (computer) and 1080p (HDTV). 24-100kHz H-Freq & 40-150Hz V-Freq.
CONTROLS:	Front panel, IR, and RS-232.
POWER SOURCE:	12V DC.
DIMENSIONS:	21.85cm x 15.0cm x 4.2cm (8.6" x 5.9" x 1.65") W, D, H.
WEIGHT:	0.6kg (1.3lbs) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-701xl 19" rack adapter.