




VS-211HDxI

2x1:2 3G HD-SDI Automatic Standby Switcher



The **VS-211HDxI** is a high-performance automatic switcher for signals up to 3G HD-SDI. When configured as a standby switcher, it switches to the secondary input when the primary input is lost.

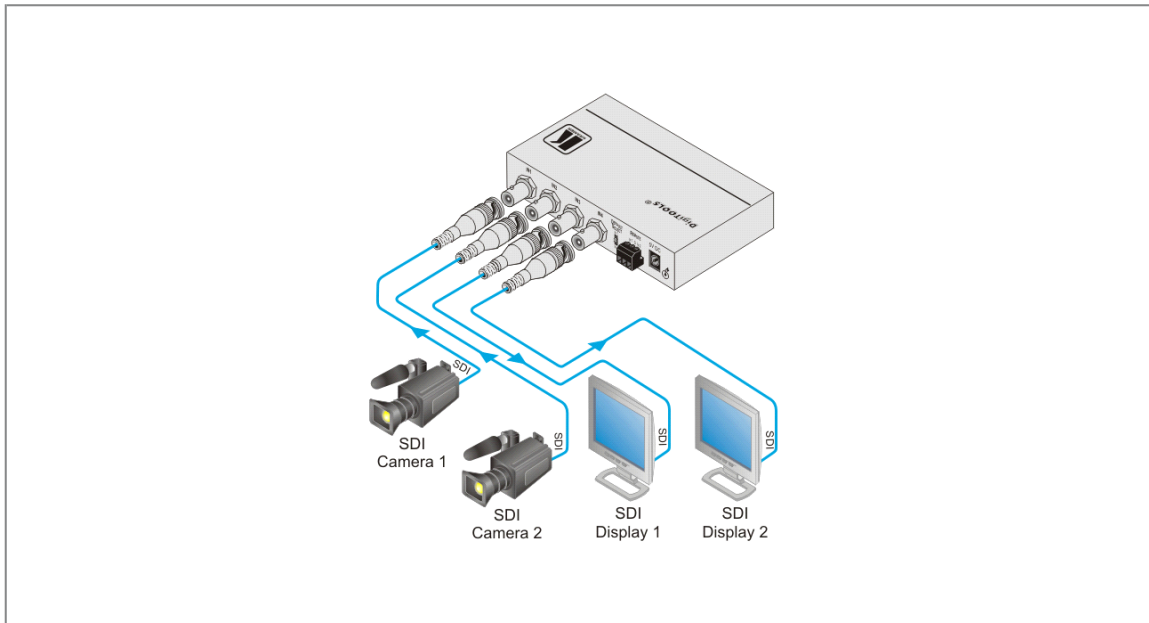



VS-211HDxI

FEATURES

- **Max. Data Rate** - 2.97Gbps.
- **Multi-Standard Operation** - SDI (SMPTE 259M/344M), HD-SDI (SMPTE 292M) & 3G HD-SDI (SMPTE 424M).
- **HDTV Compatible.**
- **Control** - Contact closure or automatic switching.
- **Automatic Standby Switching** - Switches from the secondary input to the primary input when a primary signal is detected.
- **Primary Input** - Selectable.
- **Active Input LED Indicators.**
- **Compact DigiTOOLS™** - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

TECHNICAL SPECIFICATIONS

INPUTS:	2 x 3G HD-SDI video on BNC connectors.
OUTPUTS:	2 x 3G HD-SDI video on BNC connectors.
MAX. OUTPUT LEVEL:	800mVpp/75Ω.
DATA RATE:	Up to 2.97Gbps.
CONTROLS:	Contact closure remote control, input default selection switch.
COUPLING:	AC.
POWER SOURCE:	5V DC, 400mA.
DIMENSIONS:	12cm x 7.2cm x 2.4cm (4.7" x 2.8" x 1.0") W, D, H.
WEIGHT:	0.3kg (0.66lbs).
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-3T 19" rack adapter.