




VS-33V

3x1 Composite Video Switcher



The **VS-33V** is a high-performance switcher for composite video signals. Switching during the vertical interval ensures glitch-free switching with genlocked sources.

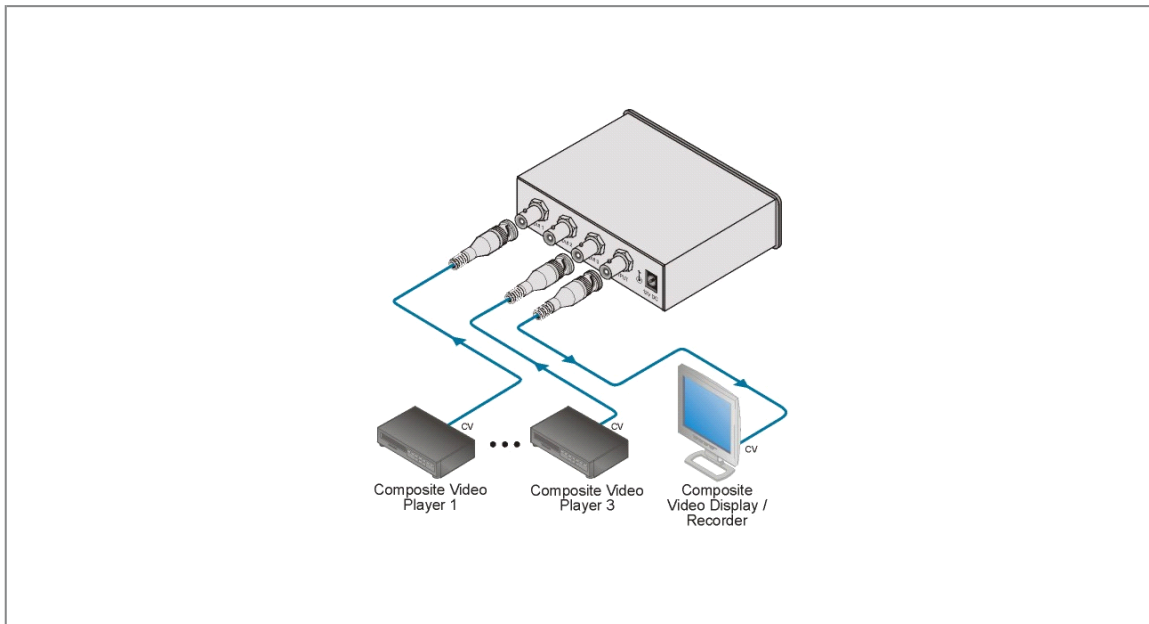



VS-33V

FEATURES

- Bandwidth - 46MHz (-3dB).
- Vertical Interval Switching.
- Desktop Size - Compact size. Three units can be rack mounted side-by-side in a 2U rack space with the optional RK-SM adapter.

TECHNICAL SPECIFICATIONS

INPUT:	3 composite video, 1Vpp/75Ω on BNC type connectors.
OUTPUT:	1 composite video, 1Vpp/75Ω on a BNC type connector.
MAX. VIDEO OUTPUT:	1.5Vpp/75Ω.
VIDEO BANDWIDTH (-3dB):	46MHz.
DIFF. GAIN:	0.58%.
DIFF. PHASE:	0.44 Deg.
K-FACTOR:	<0.05%.
VIDEO S/N RATIO:	75dB.
SWITCHING:	Vertical interval.
CROSSTALK:	-50dB.
POWER SOURCE:	12V DC 40mA.
DIMENSIONS:	11.7cm x 6cm x 3.2cm (4.6" x 2.4" x 1.3") W, D, H.
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	12V DC power supply.
OPTIONS:	RK-SM 19" rack adapter.