




VS-4216

16-Port RS-422 Matrix Switcher



The **VS-4216** is a high-performance bidirectional matrix switcher for RS-422 control signals. It can connect multiple ports to create from one to eight bidirectional communication groups.

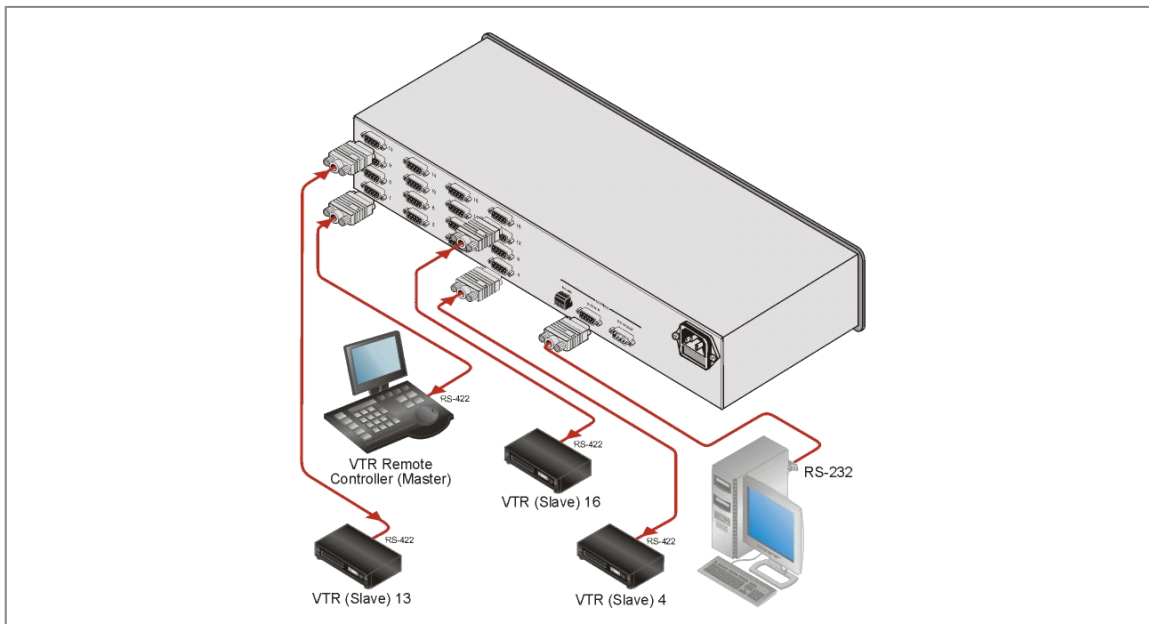



VS-4216

FEATURES

- **Control** - Front panel, RS-232 (K-Router™ Windows®-based software is included), & RS-485.
- **Memory Locations** - Stores multiple switches as presets to be recalled and executed when needed.
- **Standard 19" Rack Mount Size** - 2U.

TECHNICAL SPECIFICATIONS

INPUT/OUTPUT: 16 in/out ports on 9-pin D-sub (F) connectors, fully compliant to TIA/EIA-422-B standard.

CONTROLS: Manual with push buttons on front panel, RS-485 and RS-232 PC interface (in and out).

POWER SOURCE: 230V AC, 50/60Hz, (115V USA) 15VA.

DIMENSIONS: 19" x 7" x 2U W, D, H, rack mountable.

WEIGHT: 3.5kg (7.8lbs) approx.

ACCESSORIES: Power cord, Windows®-based control software, null-modem adapter.