




## VS-88A

### 8x8 Balanced Stereo Audio Matrix Switcher



The **VS-88A** is a high-performance matrix switcher for balanced stereo audio signals. It can route any or all inputs to any or all outputs simultaneously.

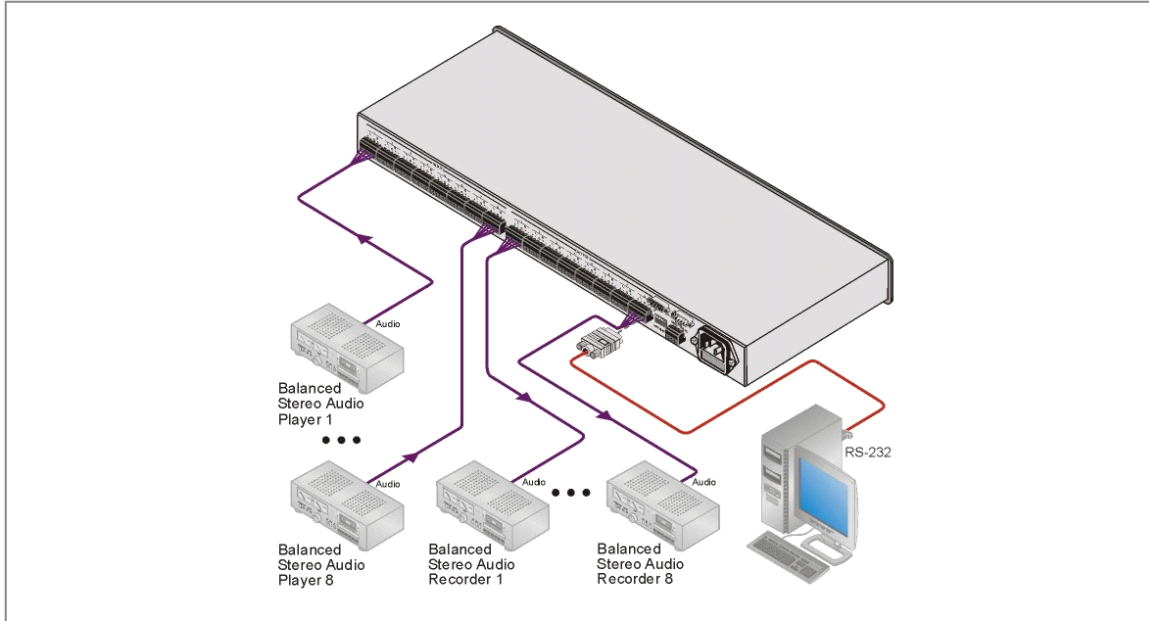



## VS-88A

---

### FEATURES

---

- **S/N Ratio** - 84dB unweighted (1Vpp).
- **Control** - Front panel, RS-232 (K-Router™ Windows®-based Kramer software is included), RS-485.
- **Take Button** - Executes multiple switches all at once.
- **Memory Locations** - Stores multiple switches as presets to be recalled and executed when needed.
- **Worldwide Power Supply** - 100-240V AC.
- **Standard 19" Rack Mount Size** - 1U.

### TECHNICAL SPECIFICATIONS

---

<b>ACCESSORIES:</b>	Power cord.
<b>INPUTS:</b>	8 balanced stereo audio, +4dBu/33kΩ on detachable terminal blocks.
<b>OUTPUTS:</b>	8 balanced stereo audio, +4dBu/50Ω (20Vpp max) on detachable terminal blocks.
<b>AUDIO BANDWIDTH (-3dB):</b>	100kHz.
<b>AUDIO S/N:</b>	84dB unweighted (1Vpp).
<b>CONTROL:</b>	22 front panel buttons, RS-232 and RS-485 control interface.
<b>AUDIO THD:</b>	0.025% (1Vpp, 1kHz).
<b>2nd HARMONIC:</b>	0.013%.
<b>MAX. AUDIO:</b>	>20dBu.
<b>DISPLAY:</b>	Current switcher status on 8 7-segment LEDs.
<b>POWER SOURCE:</b>	115/230V AC, 50/60Hz, 16VA max.
<b>DIMENSIONS:</b>	19" x 7" x 1U W, D, H, rack mountable.
<b>WEIGHT:</b>	3.5kg (7.8lbs) approx.