

ACT-24TC Rechargeable Bodypack Transmitter


Key Features

- Miniature, sturdy plastic compact design.
- 3 LEDs indicate battery status and turn to red to indicate low battery.
- Unique battery cover design provides easy access to operational controls and protects against accidental change of settings.
- LED in the mute/AF button is lit or off to indicate AF status.
- Connector for optional MJ-70 remote mute switch cable.
- One-touch ACT syncs the transmitter and receiver frequency automatically.
- Selectable impedance for microphone or guitar/line inputs.
- Mini-XLR input with secure screw lock connector for lavalier / headworn mics and guitar.
- Transmitter has high-efficiency circuitry design. The included single rechargeable lithium battery can be easily removed or interchanged for charging. The intelligent battery charger maintains a high charge capacity for up to 600 charge cycles for cost saving and is environmentally friendly.



Microphone Capsules

MU-13	Single-sided Earworn Microphone (beige)
MU-23	Omni-directional Headworn Microphone (beige, fixed connector)
MU-23d	Omni-directional Headworn Microphone (beige, detachable cont)
MU-210	Uni-directional Headworn Microphone (beige, fixed connector)
MU-210d	Uni-directional Headworn Microphone (beige, detachable cont.)
MU-53L MU-53LS	Uni-directional Lavalier Microphone (black beige)
MU-55L MU-55LS	Omni-directional Lavalier Microphone (black beige)
MU-53HN MU-53HNS	Uni-directional Headworn Microphone (black beige)
MU-55HN MU-55HNS	Omni-directional Headworn Microphone (black beige)

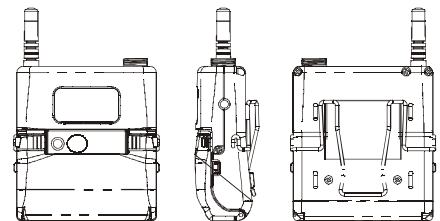

Accessories

ASP-30	Neoprene Sports Pouch
MJ-70	Remote Mute Switch
MU-40G	Instrument Cable
MP-20	Battery Charger
MP-80	3-in-1 Transmitter Charging Station
TC-18	Transmitter Shielding Storage Case

Technical Specifications

Frequency Range	2.4 - 2.4835 GHz
Channel Set-Up	ACT Sync
RF Output Power	2 mW / 10 mW switchable (country dependent)
Transmitting Mode	Frequency hopping
Max. Audio Input	6.5 dBV
Impedance	1.0M Ω
Mute Connector	Optional MJ-70 remote mute switch
Battery Meter	4-level green / red LED display
Battery Type	1 ICR-18500 rechargeable lithium battery
Current Consumption	Approx. 138 mA
Operating Time	A 25-minute fast charge provides up to 1 hour operation. Minimum 10 hours of operation per 4-hour full charge (depending on the battery quality).
Dimensions (W x H x D)	63 x 70 x 25 mm / 2.5 x 2.8 x 1 "
Net Weight	Approx. 66 g / 2.3 oz



MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw

Specifications subject to change without notice. SS016/01