

ACT-32H Handheld Transmitter

Key Features

- Robust, lightweight plastic housing.
- The unique multi-layered metal grille protects the capsule against impact, rolling and pop noise, ensuring clarity of sound.
- Interchangeable capsule module with premium condenser or dynamic options for easy and fast changeovers.
- Premium condenser capsules exhibit high fidelity, wide dynamic range, fast transient responses, good feedback rejection, accurate sound image characteristics, transparent sound quality and withstand maximum SPL.
- Reversible end-cap allows power on/off switch being locked to avoid accidental power-off during performance.
- Impact-resistant battery compartment holds 2 AA batteries.
- Backlit LCD displays various parameters and status.
- Stable PLL circuits. Automatically synchronized with the receiver's frequency by MIPRO's patented ACT™ function.
- Patented "built-in" antenna design.
- Interchangeable colored rings for microphone channel identification on stage.
- High-efficiency circuitry design provides more than 16 hours of operation from 2 AA batteries (depending on the battery quality).



Microphone Capsules


MU-39	Dynamic Capsule
MU-59	Professional Dynamic Capsule
MU-70	Condenser Capsule
MU-80	Condenser Capsule
MU-90	Condenser Capsule

Accessories

MS-20	Desktop Microphone Tripod
MD-20	Handheld Transmitter Microphone Holder
RH-77a	Multi-Colored Rings
SW-20	Foam Windscreens
TC-18	Transmitter Shielding Case

Technical Specifications

Frequency Range	480 - 934 MHz
Bandwidth	24 MHz
Oscillation Mode	PLL Synthesized
Channel Set-Up	ACT Sync
RF Output Power	10mW / 30mW (switchable)
Spurious Emissions	< -55 dBc
LCD Display	Group, Channel, Battery status & error codes
Max. SPL	140 dB SPL
Battery Type	AA alkaline × 2
Current Consumption	Approx. 92 mA
Dimensions (Ø × L)	50 × 233 mm / 2 × 9.2 "
Weight	Approx. 246 g / 8.68 oz, excluding batteries

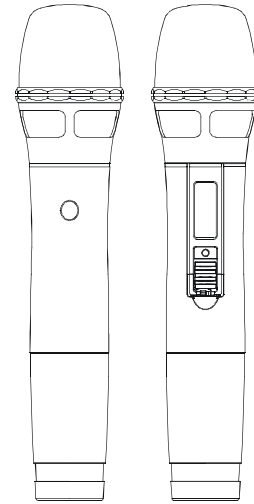

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw