


MA-708

Portable Wireless PA System

Weighting under 17 kg and delivering a huge 190 watts of power, the 2-way MA-708 has set a new benchmark for performance and flexibility in Portable Public Address Systems.

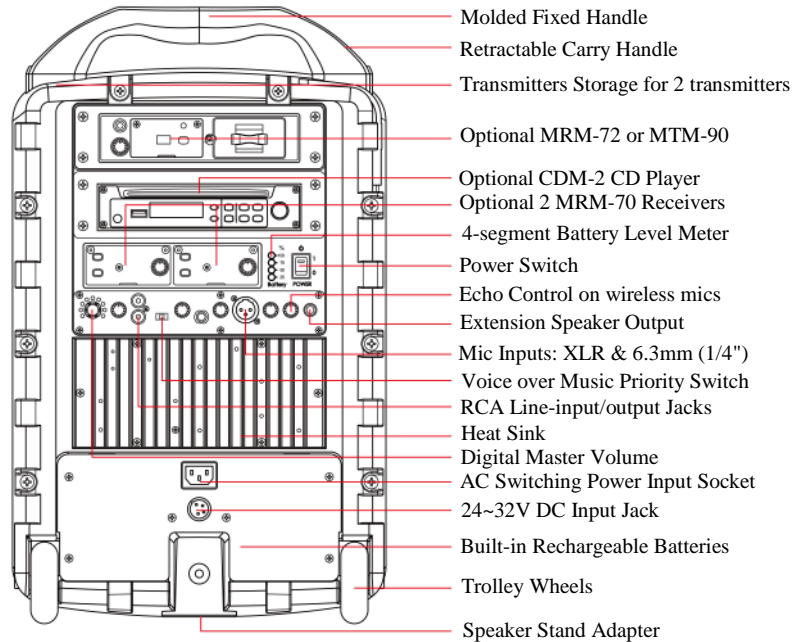

- Molded Fixed Handle
- Retractable Carry Handle
- Transmitters Storage for 2 transmitters
- Optional MRM-72 or MTM-90
- Optional CDM-2 CD Player
- Optional 2 MRM-70 Receivers
- 4-segment Battery Level Meter
- Power Switch
- Echo Control on wireless mics
- Extension Speaker Output
- Mic Inputs: XLR & 6.3mm (1/4")
- Voice over Music Priority Switch
- RCA Line-input/output Jacks
- Heat Sink
- Digital Master Volume
- AC Switching Power Input Socket
- 24~32V DC Input Jack
- Built-in Rechargeable Batteries
- Trolley Wheels
- Speaker Stand Adapter

Ideal Applications

Ideal for medium to large-scale gatherings such as schools, places of worship, sporting events, corporate meetings, seminars & presentations, military, law enforcement events, fitness & aerobics centers, auctions, election campaigns, parks, theme parks.

Key Features

- Class D amplifier produces 190-watt audio output.
- 8" woofer & 1" titanium compression driver.
- 3 power modes: AC, rechargeable battery & DC jack.
- Up to 7 hours of standby time per charge.
- For crowds up to 1,000.
- Up to 4 optional diversity 16-channel receiver modules.
- AutoScan and ACT sync channel set-up technology.
- Interference warning indicator and control management.
- Optional CD/USB Card player.
- Industry's only MTM-90 wireless interlinking option.
- Smart 4-segment rechargeable battery "fuel gauge" meter.
- Voice over music priority (VOP) & Echo effect features.
- Built-in two transmitters storage compartment.
- Line-input & output.

UHF Wireless

- **MRM-70** Single 16-ch Diversity Receiver Module
- **MRM-72** Dual 16-ch Diversity Receiver Module
- **ACT-30H/30Hr** Handheld Transmitter
- **ACT-30T** Bodypack Transmitter
- **MU-53L/55L** Uni/Omni-directional Lavalier Mic
- **MU-53HN/55HN** Dual-sided Uni/Omni-directional Headset
- **MU-210/23** Dual-sided Uni/Omni-directional Headset
- **MU-13** Single-sided Omni-directional Headset

Accessories

- **CDM-2** CD/USB player with remote control
- **MTM-90** Wireless Interlinking Transmitter
- **MB-70** Replacement Rechargeable Battery
- **MA-708EXP** Passive Expansion Speaker
- **MS-70** Tripod Speaker Stand
- **SC-80** Storage Bag

Technical Specifications

AF Power Output:	120W RMS (190W Max) / 4Ω
Frequency Response:	50 Hz~18 kHz
Mic Input:	Balanced XLR & Unbalanced 6.3mm (1/4")
Standby Time:	Up to 7 hours per charge
Receiver Channels:	UHF 16 auto-scannable frequencies
Channel Set-up:	Scan and ACT sync
T.H.D.:	< 1%
Treble Speaker:	1" Titanium Compression Driver
Bass Speaker:	8" Neodymium Cone Driver
Line Input:	RCA jack
Line Output:	RCA jack
Power Supply:	Built-in 12V/4.5AH rechargeable battery (MB-70) with charger & 100~240V AC switching power supply
Dimensions:	336(W) x 545(H) x 325(D) mm 13.2(W) x 21.5(H) x 12.8(D) inches
Weight:	16 kg / 35 lbs (batteries included)
Color:	Black or White

Specifications subject to change without notice

