

MIPRO[®]

MM-109

Hypercardioid Dynamic Microphone




Features

1. Fitted with interchangeable MU-59 hypercardioid capsule module.
2. The exterior multi-layer metal grille protects the capsule to prevent impact and pop noise.
3. The upper exterior grille is able to be detached easily for cleaning and hygiene practices.
4. Superb directionality. Focuses on the main sound source and minimizes background noise and feedback.
5. Soft and mellow sound quality; Rich high- & low-frequency presence.
6. Sustains high SPL without distortion.
7. Low handling noise.


Specifications

Capsule	: Dynamic (interchangeable)
Housing	: Die-cast Zinc Alloy
Directionality	: Hypercardioid
Sensitivity	: -54dBV/Pa $\pm$ 3dB (0dB=1V Open-circuit voltage)
Frequency Response	: 50Hz~18KHz
Output Impedance	: 400 Ω $\pm$ 30%
Note	: Refer to actual product in the event of product description discrepancy

Frequency Response

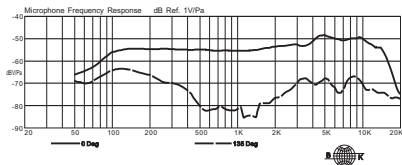

Polar Pattern



Measure Distance: 50cm

FC & IC - ID

THIS DEVICE COMPLIES WITH PART74 OF THE FCC RULES AND RSS-123 ISSUE2 OF CANADA. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

MIPRO MIPRO Electronics Co., Ltd.

Headquarters: 814 Pei-Kang Road, Chiayi, 60096, Taiwan.

Web: www.mipro.com.tw

E-mail: mipro@mipro.com.tw



2CE483A

AS130301

Design and specifications are subject to change without prior notice