



3D IR Transmitter TY-3D30TRW


● Product specification (design and specification subject to change without notice)

IR input terminal	M3 jack x 1
Power	DC 8V, 150 mA
Power Consumption	DC 8V, 1.2W
Infrared Ray Wavelength	850 nm
Viewing Range	3D IR Transmitter within Approx.3.2 m from front surface (Within ±35-degree horizontal, ±20-degree vertical)
Dimensions (W x H x D)	190.0 mm × 50.0 mm × 58.2 mm with stand : 190.0 mm × 69.0 mm × 69.7 mm
Weight	Approx. 190.0 g (excluding the dedicated stand) Approx. 210.0 g (including the dedicated stand)
Carton Dimensions (W x H x D)	Approx. 263.0 mm x 105.0 mm x 180.0 mm
Gross Weight	Approx. 700.0g
Operating enviroment	Temperature: 0°C to 40°C Humidity : 20 to 80 % (Non condensation)
Included Accessories	Connection cable (3m x 1), Wire bracket (1), Clampers (1), Stand*(1), Screw (1)
Safty Regulations	EN60065
Radiation Regulations	EN55013,EN55020, CISPR13

● DIMENSIONS

Cautions: This drawing is not a scale
Units : mm

<with stand>

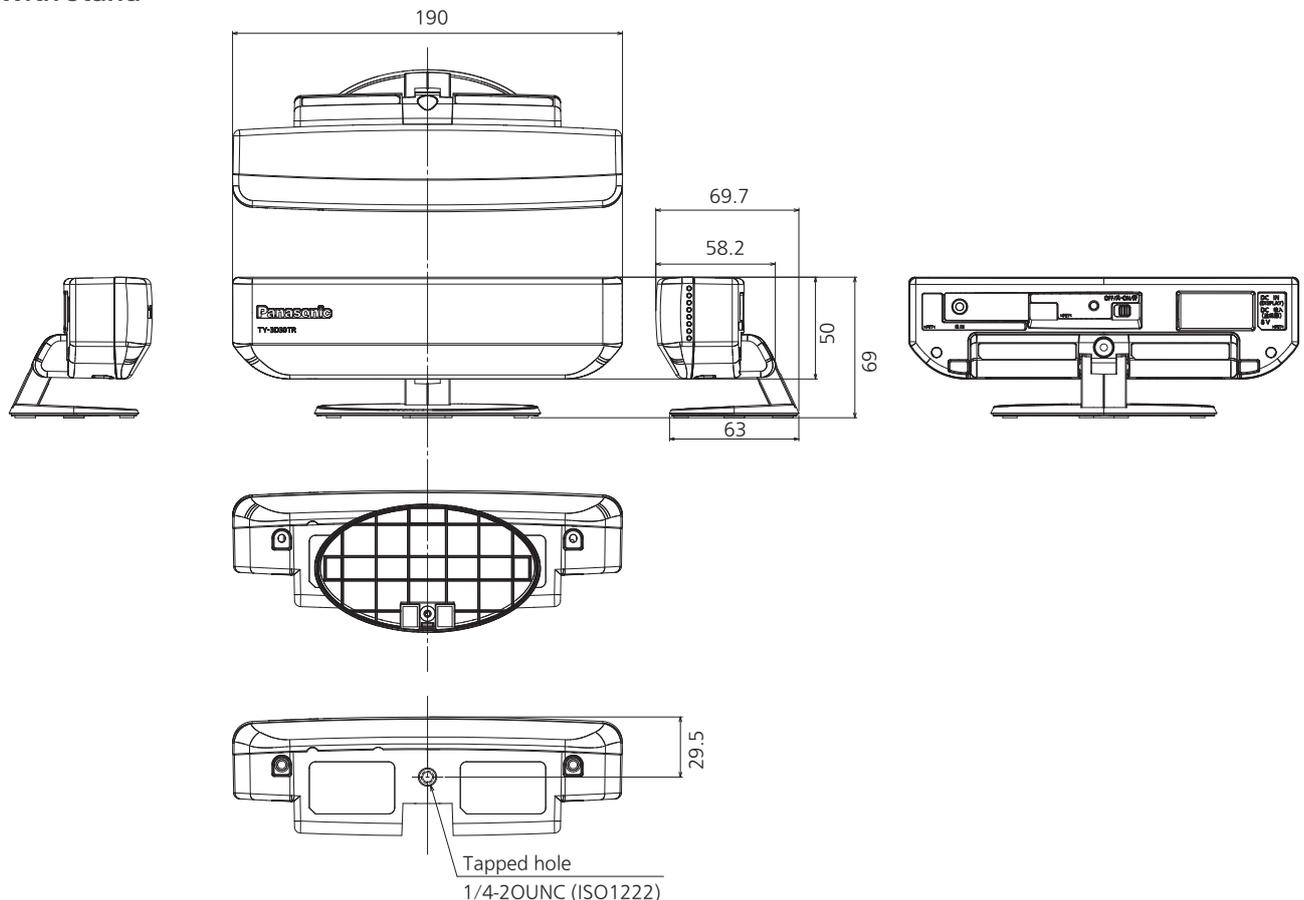

<without stand>

Cautions: This drawing is not a scale
Units : mm

