

# DIGITAL SOUND-CENTER 150

**RCS**<sup>®</sup>  
mobile sound



- N Conferences and seminars
- N advertising and sales events
- N Trade fairs and exhibitions
- N Hotels and sporting events
- N Schools and Presentations



optionally with:





Mobile loudspeaker and amplifier system **DIGITAL SOUND-CENTER 150**



- 2-way system
- Powerful Class-D power amplifier
- True Diversity
- VOICE-OVER function

The DSC-150 loudspeaker and amplifier system is ideal for high-quality mobile sound systems. The device impresses with its rich, crystal-clear sound and sets new standards in its device category.

The 150 W RMS power amplifier is designed using Class-D technology. In addition to the high level of efficiency, this enables relatively low power consumption for this power class and thus guarantees significantly longer battery life.



The robust, impact- and scratch-resistant plastic housing is extremely durable and therefore ideal for mobile use.

The pre-assembled wheels and the extendable handle make transporting the device much easier.

The basic device DSC-150 can be equipped with up to 2 UHF receiver modules (U1/U2) as well as optionally with the DSM-003CD or DSM-002AR players as required. The DSM-200BT BT module can be installed in any device configuration.

The following basic models are available:

**DIGITAL SOUND CENTER\***.....**DSC-150**  
basic version, without UHF receiver module

**DIGITAL SOUND CENTER\***.....**DSC-150U1**  
with integrated 1-channel UHF receiver

**DIGITAL SOUND CENTER\***.....**DSC-150U2**  
with integrated 2-channel UHF receiver

**Replacement battery set**, 5.4 Ah (for DSC-101/150).....**BA-035**

\*The sound carrier modules are available optionally.

Modules for the **DIGITAL SOUND CENTER:**

When ordered with a sound carrier module, the **DIGITAL SOUND CENTER** is delivered fully equipped and ready for use.



**CD/MP3/BT/USB/SD-Card Player**.....**DSM-003CD** with **pitch control** and remote control. Player for playing standard formats. Integrated pitch control to influence the playback speed.



**UHF receiver module** in true diversity technology.....**DSC-016B**  
for retrofitting, 16 selectable frequencies (863-865 MHz)



**BT module**.....**DSM-100BT**  
for retrofitting, for audio transmission from smartphone, tablet or PC




**BT player module**, with USB and SD card.....**DSM-200BT**  
for audio transmission from smartphone, tablet or PC, including remote control



# DIGITAL SOUND-CENTER 150 Mobile speaker & amplifier system

# RCS

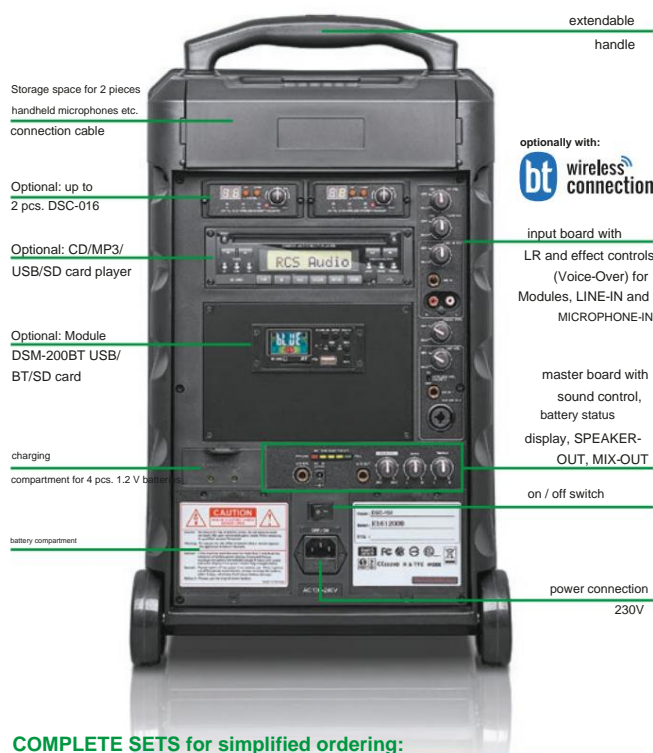

## COMPLETE SETS for simplified ordering:

### SET 1

DSC-150 without UHF receiver and microphone, - incl. CD player DSM-003CD

**DSC-150 SET 1 . . . . . DSC-150S1**

### SET 2

DSC-150 with integrated 1-channel UHF receiver  
- incl. CD player DSM-003CD - incl.  
UHF receiver and handheld microphone UH-016B

**DSC-150 SET 2 . . . . . DSC-150S2**

### SET 3

DSC-150 with integrated 1-channel UHF receiver  
- incl. CD player DSM-003CD - incl.  
UHF receiver and pocket transmitter UB-016  
- incl. headset microphone HS-200S/B

**DSC-150 SET 3 . . . . . DSC-150S3**

### SET 4

DSC-150 with integrated 2-channel UHF receiver  
- incl. CD player DSM-003CD - incl.  
2x UHF receiver and 2x handheld microphone UH-016B

**DSC-150 SET 4 . . . . . DSC-150S4**

### SET 5

DSC-150 with integrated 2-channel UHF receiver  
- incl. CD player DSM-003CD - incl.  
UHF receiver and pocket transmitter UB-016  
- incl. UHF handheld microphone UH-016B -  
incl. headset microphone HS-200S/B

**DSC-150 SET 5 . . . . . DSC-150S5**

## DIGITAL SOUND-CENTER accessories

### carrying and storage cover



Weatherproof, high-quality vinyl cover for transport, operation and storage of the DIGITAL SOUND CENTER.

### Carrying and storage cover. . . . . VC-150

for DSC-150 or additional speakers

### UHF accessories:

#### UHF handheld microphone

electret handheld microphone, optimized for voice transmission. 16 selectable frequencies in the registration-free range.

The battery status indicator constantly informs you about the current status.

The power supply is provided by 2 Mignon batteries (AA) or corresponding rechargeable batteries.



b0681

**UHF Handheld Microphone (863-865 MHz) . . . . . UH-016B**

#### UHF pocket transmitter (for LA-200B or HS-200)

Pocket transmitter for use with the LA-200B or HS-200 microphones. The 16 selectable frequencies are in the registration-free range. With battery status indicator and removable antenna. Power is supplied by 2 mignon batteries (AA) or equivalent rechargeable batteries.



b0681

**UHF pocket transmitter (863-865 MHz) . . . . . UB-016B**

#### lavalier clip-on microphone

Condenser clip-on microphone with cardioid characteristic to match the UB-016 bodypack transmitter.

The cable length is approx. 90 cm.



**Lavalier Microphone . . .**

#### headset microphone

Cardioid polar pattern  
Condenser microphone. Very comfortable to wear, suitable for the UB-016 bodypack transmitter.  
Cable length approx. 100 cm.



**Headset microphone, skin color. . . . . HS-200S**

**Headset microphone, black. . . . . HS-200B**

DIGITAL SOUND-CENTER accessories

carrying and storage bag

Tear-resistant, water-repellent vinyl fabric bag with two inner compartments for up to three tripods, zipper and large carrying strap.



Carrying and storage bag . . . . . CB-130B

for up to 2 speaker floor stands and 1 microphone stand

Connection cable, 30 m for additional SOUND CENTER. . . AC-300

additional speakers

The efficiency of the system can be improved with the help of the identical, passive additional loudspeaker DSC-150ZL.

Additional speakers. . . . . DSC-150ZL

passive 150W, for SOUND-CENTER



floor stand

Stable, very stable floor stand made of aluminum (3.2 kg) for setting up the DSC-150 models. The stepless height adjustment enables optimal adaptation to local conditions.

Floor stand. . . . . QST-185 for DSC-150 or additional speaker  
DSC-150 ZL

Technical data	DSC-150
program performance / RMS	250 W / 150 W (Class-D)
power source	AC 230 V or DC 24 V/3 A
battery	2x 12 V / 5 Ah
battery life	6 - 8 hours
speakers	10ŷ woofer, 1.5ŷ horn tweeter
entrances	Line In jack 6.3 mm; Line In Cinch; MIC XLR; MIC jack 6.3;
outputs	MIX OUT jack 6.3 mm; Speaker OUT 4-16 Ohm
UHF receiver	True Diversity, 863-865 MHz, max. 2 pieces.
tone control	twice
Housing	ABS
dimensions/weight	H 500 x W 320 x D 360 mm, 16 kg

\*