



19" swing frame cabinets, depth 550 mm (with plexiglass doors)

19" swing frame cabinets, depth 550 mm (without doors)

Please note: When comparing prices, please take into account, our swing frame cabinets are delivered completely assembled and packaged.

Model designations


Plexiglass doors

Plexiglass door, for RSS-5524, (25 kg)	RTS-024
Plexiglass door, for RSS-5530, (30 kg)	RTS-030
Plexiglass door, for RSS-5540, (39 kg)	RTS-040

Model designations

19" swing frame cabinets

19" Swing Frame Cabinet, (24 RU)	RSS-5524
19" Swing Frame Cabinet, (30 RU)	RSS-5530
19" Swing Frame Cabinet, (40 RU)	RSS-5540

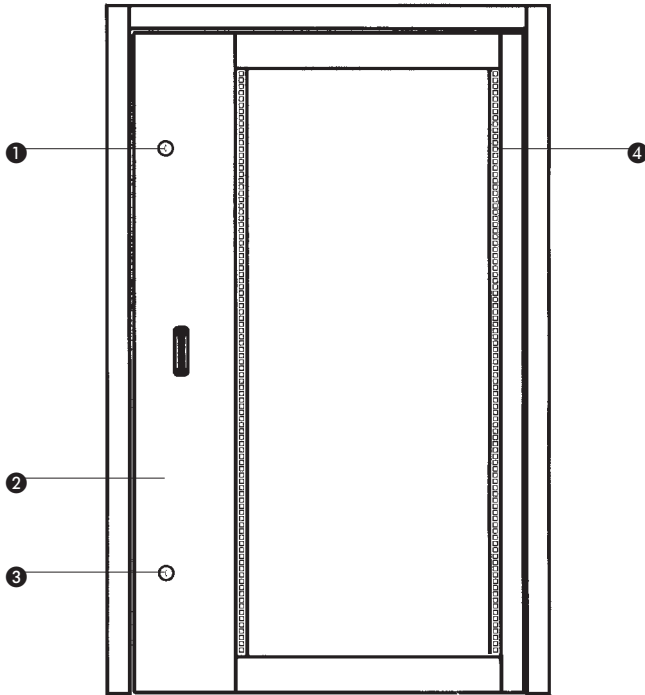

- 1 Keyed cylinder lock
- 2 Stable 19" swinging rack
- 3 Universal lock
- 4 19" rackrails with ASA hole pattern



The picture shows the additional castor on 30 and 40 RU swinging rack cabinets.

1 RU = 44,45 mm (1 1/4").

H = overall height in mm
D = overall depth in mm
W = overall width in mm
h = usable height (for 19" units) in mm
d = usable depth (rack frame can be pivoted) in mm

Models	RU	H	h	D	d	W	Weight
RSS-5524	24	1250	1067	550	490	800	93 kg
RSS-5530	30	1515	1334	550	490	800	108 kg
RSS-5540	40	1960	1778	550	490	800	132 kg

Description

The RSS series 19" swing frame cabinets presented in this section have been especially developed for the use with audio systems.

The cabinets with a 19" swing frame rack serve to accommodate rackmount devices, subracks, front panels etc. with 19" design according to DIN 41494.

The cabinets feature high-quality design and finish as well as excellent stability, thus complying with the latest standards of manufacture. For example, the rackrails have ASA hole pattern.

Please consider the following features:

- The frame construction consists of extremely stable welded sheet steel sections with holes for floor and wall anchoring. Colour: RAL-7032.
- Safe cooling is ensured through appropriate design of the rear panel (free space of 3 RU at the bottom, perforated vent sections at the top).
- The additional castor for the swing frame rack (with 30 and 40 RU cabinets) permits easy pivoting of the rack frame, even when the cabinet is full.
- The opening angle of 170° provides easy access to the rear of the rack, even when devices are mounted in the swing frame rack.
- Cable entry is possible from the top, the bottom or the rear. Mounting facilities for components such as terminal strips, etc. are provided on the rear.
- The 19" rackrails with ASA hole pattern permit mounting of devices from different manufacturers.
- The toughened safety plexiglass doors of the RTS series have keyed cylinder locks and are available for all swing frame rack cabinets of the RSS series.
The mounting of the plexiglass doors to the swinging rack cabinets will be carried out by the customer. To provide optimum customer-friendliness, the cabinets have been well prepared in such a way that the requirements for mounting the doors have been reduced to a minimum.
- For devices that do not have a 19" design (HIFI design) a wide range of 19" accessories such as shelves, sliding trays, drawers, blank panels, etc. is available. See "19" accessories" section in this catalogue.

19"-accessory parts

With heavy rackmount devices the use of a pair of RGL-550 slide rails is recommended.

Slide rails **RGL-550**

The optional RST-5500 base is suitable for all cabinets of the RSS series and provides additional room, e.g. for cable management.

Base, H x W x D 200 x 800 x 550 mm (weight: 27 kg) **RST-5500**