

XLR-PLUG CONNECTORS

XLR-Inline jack, silver

FEMALE

- 3-pole XLR-Coupler
- Self adjusting clamps as strain relief
- Cable-bend protection through vulcanised rubber ending
- Robust, nickel-plated metal-diecast case
- Colour: silver, black



XLR-Inline jack, silver **XLR-203 F**

XLR-Jack, silver

MALE

- 3-pole XLR-Jack
- Self adjusting clamps as strain relief
- Cable-bend protection through vulcanised rubber ending
- Robust, nickel-plated metal-diecast case
- Colour: silver, black



XLR-Jack, silver **XLR-203 M**

XLR-Inline jack, black

FEMALE

- 3-pole XLR-Coupler (female)
- Self adjusting clamps as strain relief
- Cable-bend protection through vulcanised rubber ending
- Robust, burned-in varnish metal-diecast case
- Colour: black



XLR-Inline jack, black **XLR-303 F**

XLR-Jack, black

MALE

- 3-pole XLR-Jack (male)
- Self adjusting clamps as strain relief
- Cable-bend protection through vulcanised rubber ending
- Robust, burned-in varnish metal-diecast case
- Colour: black



XLR-Jack, black **XLR-303 M**

XLR-Angle-Inline jack, silver

FEMALE

- 3-pole XLR-Angle-Coupler with strain relief
- Cable-bend protection through vulcanised rubber ending
- Colour: silver; depth until top edge of angle: 25 mm;



XLR-Angle-Inline jack, silver **XLR-103 WF**

XLR-Angle-Jack, silver

MALE

- 3-pole XLR-Angle-Jack with strain relief
- Cable-bend protection through vulcanised rubber ending
- Colour: silver; depth until top edge of angle: 25 mm;



XLR-Angle-Jack, silver **XLR-103 WM**

Adapter XLR-Inline jack on 6,3 mm (mono) Jack Plug

FEMALE

- 3-pole XLR-Inline jack on 6.3 mm (mono) jack plug
- Robust, nickel-plated metal-diecast case
- Colour: silver



XLR/Jack-Adapter **AXJ-100 F**

Adapter XLR-Inline jack on 6,3 mm (mono) Jack Plug

MALE

- 3-pole XLR-Inline jack on 6.3 mm (mono) jack plug
- Robust, nickel-plated metal-diecast case
- Colour: silver



XLR/Jack-Adapter **AXJ-100 M**

Jack Socket 6,3 mm (mono), silver

FEMALE

- 2-pole 6.3 mm mono jack socket
- Self adjusting clamps as strain relief
- Cable-bend protection through vulcanised rubber ending
- Robust, nickel-plated metal-diecast case
- Colour: silver, black



Jack Socket (mono), silver **JC-102 FM**

Jack Plug 6,3 mm (mono), silver

MALE

- 2-pole 6.3 mm mono jack-plug
- Self adjusting clamps as strain relief
- Cable-bend protection through vulcanised rubber ending
- Robust, nickel-plated metal-diecast case
- Colour: silver, black



Jack Plug (mono), silver **JC-102 MM**

Jack Soket 6,3 mm (stereo), silver

FEMALE

- 3-pole 6.3 mm stereo jack socket
- Self adjusting clamps as strain relief
- Cable-bend protection through vulcanised rubber ending
- Robust, nickel-plated metal-diecast case
- Colour: silver, black



Jack Socket (stereo), silver **JC-103 FS**

Jack Plug 6,3 mm (stereo), silver

MALE

- 3-pole 6.3 mm stereo jack-plug
- Self adjusting clamps as strain relief
- Cable-bend protection through vulcanised rubber ending
- Robust, nickel-plated metal-diecast case
- Colour: silver, black



Jack Plug (stereo), silver **JC-103 MS**

Cinch Socket Set

FEMALE

- 2-pole cinch socket with gold-plated contacts
- Self adjusting clamps as strain relief
- Cable-bend protection through vulcanised rubber ending
- Robust, metal-diecast case
- For cable diameter of: 5 – 6 mm
- Colour: gold/black with red and white flanges



Cinch Socket Set, black **CC-603 F**

Cinch Plug Set

MALE

- 2-pole cinch-plug with gold-plated contacts
- Self adjusting clamps as strain relief
- Cable-bend protection through vulcanised rubber ending
- Robust, metal-diecast case
- For cable diameter of: 5 – 6 mm
- Colour: gold/black with red and white flanges



Cinch Plug Set, black **CC-603 M**

XLR-Installation Jack

FEMALE

- 3-pole XLR-installation-jack
- Latching device
- Robust metal-diecast case
- Colour: black
- Typ: C



XLR-Installation Jack, black..... **XLR-503 F**

XLR-Installation Jack

MALE

- 3-pole XLR-installation-jack
- Latching device
- Robust metal-diecast case
- Colour: black
- Typ: C



XLR-Installation Jack, black..... **XLR-503 M**

XLR-Installation Jack

FEMALE

- 3-pole XLR-installation-jack
- Latching device
- Robust metal-diecast case
- Colour: black
- Typ: D



XLR-Installation Jack, black..... **XLR-403 F**

XLR-Soldering/Installation Jack

FEMALE

- 3-pole XLR-installation-jack
- Robust metal-diecast case
- Colour: black
- Typ: C



XLR-Soldering/Installation Jack, black..... **XLR-503 F**

Speaker-Installation Jack (4-pole)

FEMALE

- 4-pole Speaker-installation-jack
- Robust plastic cabinet
- Colour: black
- Typ: C



Speaker-Installation Jack, (4-pole)..... **SPC-104 F**

Jack Plug Installation Jack 6,3 mm

FEMALE

- 3-pole jack-plug-installation-jack 6.3 mm
- Latching device
- Robust metal-diecast case
- Colour: black
- Typ: C



Jack Plug Installation Jack, 6,3 mm..... **JC-203 F**

Speaker-Inline jack

FEMALE

- 4-pole Speaker-Coupler
- Strain Relief with cable-bend protection
- For cable diameter from 5 mm up to 15 mm
- Ampacity max. 30 A
- Wire-cross-section max. 4 mm²
- Colour: black, blue



Speaker-Coupler, black..... **SPC-204 F**

Speaker-Coupler

MALE

- 4-pole Speaker-coupler
- Strain Relief
- For cable diameter from 5 mm up to 15 mm
- Ampacity max. 30 A
- Wire-cross-section max. 4 mm²
- Colour: black, blue



Speaker-Coupler, black..... **SPC-204 M**

Speaker Connector

4-pole Speaker connector, which is used for the connection of two cables with cable-jacks, e.g. to extend the lengths of cables to get to the speaker. The housing of the connector is made of robust aluminium.



Speaker Connector..... **ASS-104**

Speaker Cable, 10 m

MALE

- 2-pole Speaker-speaker-cable
- **10 m** long
- Speaker / Speaker-jack with locking device
- Strain Relief with cable-bend protection
- Wire-cross-section 2x 2,5 mm²
- Colour: black, blue



Speaker Cable, 10 m **ACC-107**

Speaker Cable, desired length

MALE

- **Sold by meter, up to 40 m**
- 2-pole Speaker-loudspeaker-cable
- **Length depending on allegation** (e.g. ACC-108/1 für 1m)
- Speaker / Speaker-jack with locking device
- Strain Relief with cable-bend protection
- Wire-cross-section 2x 2,5 mm²
- Colour: black, blue



Your desired cable length
(up to 40 m max.)

Speaker Cable, desired length..... **ACC-108/xx**

XLR Cable

- Sym. XLR-Cable (connector / inline jack)
- Strain Relief with cable-bend protection
- Cable diameter: 6 mm
- Cable color: black

MALE
FEMALE



XLR Cable, 5 m **ACC-050**
XLR Cable, 10 m **ACC-100**

XLR/Jack Plug 6,3 mm (mono) cable

- Sym. Cable XLR (F) / jack-plug 6.3 mm (M)
- Strain Relief with cable-bend protection
- Cable diameter: 6 mm
- Cable color: black

MALE
FEMALE



XLR/Jack Plug 6,3 mm (mono) cable, 5 m ... **ACC-051**
XLR/Jack Plug 6,3 mm (mono) cable, 10 m .. **ACC-101**

Jack Plug 6,3 mm (stereo) on 2x Jack Plug (mono)

MALE

- Cable with jack plug 6.3 mm (stereo) on 2 x jack plug (mono)
- Strain Relief with cable-bend protection
- Cable diameter: 6 mm



Jack Plug 6,3 mm (stereo) on 2x Jack Plug (mono), 5 m **ACC-056**

Most common application:

It is most commonly used as an “insert-cable” also called Y-cable. An insert-point e.g. at the mixer contains as a stereo-jack-plug three contacts: ground, input and output.

In order to loop in an external device via the insert-point a stereo-jack-plug is necessary, which is splitted onto two mono cables. The latter will be connected with the in- and outputs of the external device.

The signal leaves the input-channel through that one pole of the insert-jack to get to the effect-device. Then this signal gets back through the other pole of the insert-jack. You then connect both of the jack-plug-cables to the effect-input and output on the other side.

*

Cable Jack Plug 3,5 mm (stereo) on 2 x Cinch (L/R)

MALE

- Cable 3.5 mm stereo jack plug on cinch L/R
- Fused with cable-bend protection

Most common application: sound-card-output of a computer on compact-amplifier-inputs.




Cable Jack Plug 3,5 mm on 2 x Cinch, 5 m .. **ACC-054**

Cable 2 x Jack Plug 6,3 mm (mono) / 2 x Jack Plug 6,3 mm (mono)

MALE

- Cable 6.3 mm mono L/R on 6.3 mm mono jack-plug L/R
- Strain Relief with cable-bend protection
- Fused with cable-bend protection

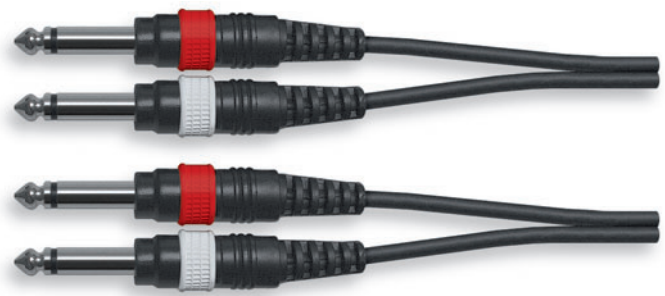

2x Jack Plug on 2x Jack Plug 6,3 mm, 5 m .. **ACC-055**