

## UNIVERSAL LENS SUPPORT (19mm/15mm Studio)

Included:

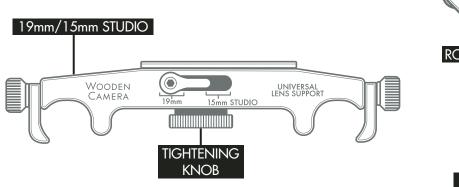





## INSTALLATION

NOTE: LENS SUPPORT comes with factory installed 3/8-16 SCREW. To remove and install additional adapters follow the steps below.

- 1. Select LENS SUPPORT, loosen thumscrew, locate and loosen TIGHTENING KNOB to remove 3/8-16.
- To switch from 19mm to 15mm STUDIO, loosen and slide THUMBSCREW to desired position and re-tighten, adjust the ROD CLAMP size by turning the THUMBWHEELS.
- Choose desired adapter type. For example: select and tighten Y BRACKET to LARGE EXTENSION and install as shown below.
- 4. Select LENS SUPPORT, insert Y BRACKET, insert TIGHTENING KNOB, adjust left or right position and up or down to proper lens height, tighten THUMBSCREW until vertical & horizontal position is secure.

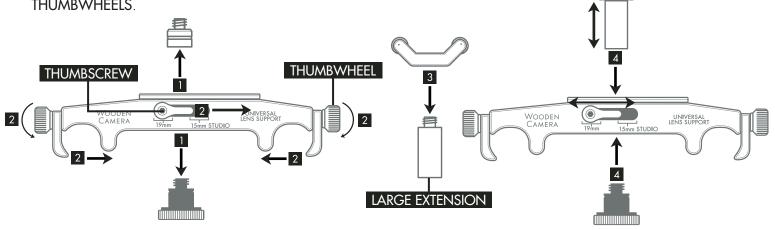

- 4. Place LENS SUPPORT on RODS and tighten using THUMBWHEELS.
- Unlock THUMBSCREW, center position under LENS FOOT and re-tighten THUMBSCREW.

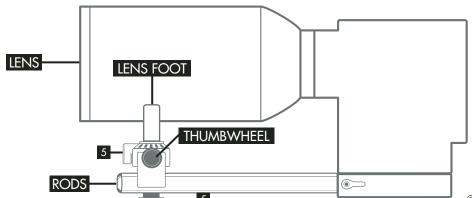

© Wooden Camera, Inc. 2011-2014