



CBR-006 WR  
(with Control)

CBR-006 SR  
(with Control)



**MADE IN GERMANY**

**6 W** Adaptations  
6 – 3 – 1.5 W



CBS-006 WR  
(with Control)


CBS-006 SR  
(with Control)

## Description

These unusual, small „Compact“ speakers, of the series CBS and CBR are inexpensive, attractive and easy to mount. The high-quality impact and scratch resistant plastic corpus ensures best boom and swing release. This “soft line” corpus design combined with a high-sound pervious grille cover is modern and decent.

Please consider the following features:

- The fitted high quality matching transformer allows a match to 1/1 – 1/2 – 1/4 of the performance.
- The plastic cabinet is impact and scratch resistant and is available on request in all RAL-colours.

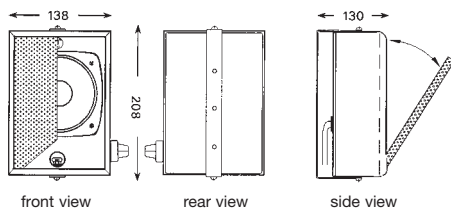


Technical data	CBR-006 WR/SR
Load rating (Music power)	6 (15) W
Transformer tapings at 100 V	6 – 3 – 1.5 W
Frequency range (Hz)	180 – 17000 Hz
Sound pressure at 1W/1m	95.5 dB
Sound pressure SPL Pmax/1m	104 dB @4kHz
Angle of refl. beam (-6dB) 1/4/8 kHz	180°/ 60°/ 45°
Speaker Ø (mm) and Impedance	130/ 8 ohms
Dimensions HxWxD/Weight	208 x 138 x 130 mm / approx. 1.3 kg
Colour corpus/ grille (series "WR"/"SR")	alpinwhite - grey/black

## Model designations (with closed back panel and mounting bracket)

**Compact-Cabinet Speaker** 6 W ..... **CBR-006 WR**  
with 100 V matching transformer, white and built-in volume control

**Compact-Cabinet Speaker** 6 W ..... **CBR-006 SR**  
with 100 V matching transformer, black and built-in volume control

- The model series-CBS (with an open back panel) is constructed to be screwed or hung up (via key hole).
- The model series-CBR has an open back panel and a lay-over mounting bracket, which allows the speaker to be turned in every direction.
- A broadband high performance speaker chassis (Ø 130mm) with an integrated high tone cone ensures a very good sound performance in spite of the small cabinet.
- The built-in volume selector (knob) is on the lower ohm side.
- The fixing is burgle proof and can be mounted horizontally, vertically or to the ceiling.

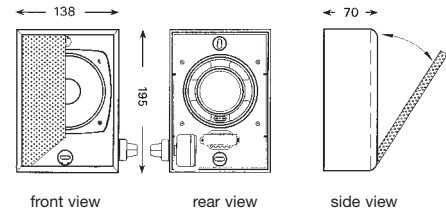

Technical data	CB-006 WR/SR
Load rating (Music power)	6 (15) W
Transformer tapings at 100 V	6 – 3 – 1.5 W
Frequency range	190 – 17000 Hz
Sound pressure at 1W/1m	95,5 dB
Sound pressure SPL Pmax/1m	104 dB @4kHz
Angle of refl. beam (-6dB) 1/4/8 kHz	180°/ 60°/ 45°
Speaker Ø (mm) and Impedance	130/ 8 ohms
Dimensions HxWxD/Weight	195 x 138 x 70 mm / appr. 1.0 kg
Colour corpus/ grille (series "WR"/"SR")	alpinwhite - grey/black

## Model designations

**Compact-Cabinet Speaker** 6 W ..... **CBS-006 WR**  
with 100 V matching transformer, white and built-in volume control

**Compact-Cabinet Speaker** 6 W ..... **CBS-006 SR**  
with 100 V matching transformer, black and built-in volume control