

KRAMER ELECTRONICS, Ltd.

vww.kramerelectronics.com


VS-41AV

4x1 Composite Video & Stereo Audio Mechanical Switcher





The VS-41AV is a highperformance switcher for composite video and unbalanced stereo audio signals. It switches any one of four inputs to a single output.

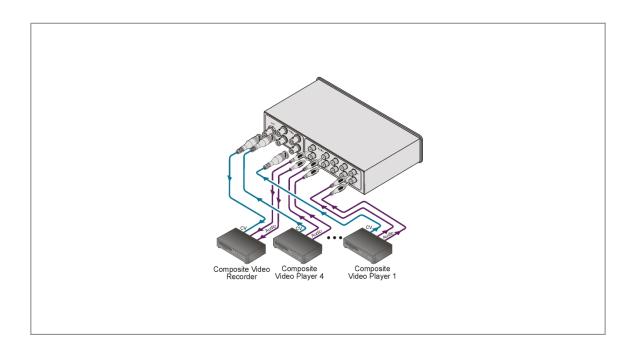



www.kramerelectronics.com

VS-41AV

FEATURES

- High Bandwidth 520MHz (-3dB).
- Mechanical (Passive) Switching No power required.
- Desktop Size Compact size. 2 units can be rack mounted side-by-side in a 1U rack space with the optional RK-81 adapter.

TECHNICAL SPECIFICATIONS

| INPUTS: | 4 video, 1Vpp/75Ω on BNC connectors. 4 audio stereo, +4dBu typical, on RCA connectors. |
|-----------------------|--|
| OUTPUTS: | 1 video, 1Vpp/75Ω on a BNC connector. 1 audio stereo, +4dBu typical, on RCA connectors. |
| SWITCHING SYSTEM: | Mechanical, break-before- make, audio-follow-video mode. |
| BANDWIDTH (- 3dB): | 520MHz (video), 100kHz (audio). |
| CROSSPOINTS: | 4 for video, 4x2 for audio, 1 set active at any given time. |
| SIGNAL LEVELS: | Up to 3Vpp video, +30dBu audio. |
| DIMENSIONS: | 18.8cm x 10.2cm x 4.4cm (7.4" x 4" x 1.7") H, W, D. |
| WEIGHT: | 0.65kg (1.44lbs) approx. |
| OPTIONS: | RK-81 19" rack adapter. |