




## XE-21V

2x1 Composite Video Mechanical Switcher

---

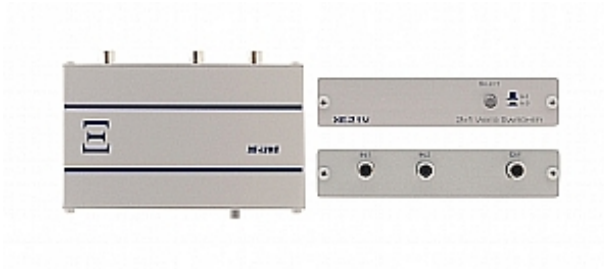

The XE-21V is a high-performance switcher for composite video signals. It switches one of two inputs to a single output.

### FEATURES

---

- High Bandwidth - 400MHz (-3dB).
- Input/Output on RCA Connectors.
- Mechanical (Passive) Switching - No power required.
- Bidirectional Operation - Operates as a 2x1 switcher (2 inputs, 1 output) or a 1x2 switcher (1 input, 2 outputs).
- Compact Kramer TOOLST™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.



## XE-21V

### TECHNICAL SPECIFICATIONS

INPUTS: 2 composite video, 1Vpp/75Ω on RCA connectors.  
OUTPUT: 1 composite video, 1Vpp/75Ω on an RCA connector.  
BANDWIDTH (-3dB): 550MHz.  
DIFF. GAIN: 0.05%.  
DIFF. PHASE: 0.01Deg.  
K-FACTOR: <0.05%.  
S/N RATIO: 73dB.  
COUPLING: DC.  
CROSSTALK: -46dB @5MHz.  
POWER SOURCE: No power needed.  
DIMENSIONS: 12cm x 7.5cm x 2.5cm (4.7" x 0.98" x 2.95") W, D, H.  
WEIGHT: 0.3kg (0.66lbs).  
ACCESSORIES: Mounting bracket.

