


"Design" HOUSING SPEAKER with rear panel



100V

PASSIV

ACTIVE



Description


This cabinet loudspeaker impresses with its strikingly innovative design. The symmetrical shape adapts perfectly to all rooms and therefore also allows it to be used as a ceiling speaker.

But we also placed great emphasis on functionality and stability during development. This means that this loudspeaker can be offered in many variations, including an optional damp room version.

Excellent playback quality and sound fidelity round off the appealing appearance.

Please note the following features:

- The BCR series is supplied with a back panel.
- Supplied with high-quality broadband chassis.
- The speaker can be mounted both horizontally and vertically.
- Convenient connection of the 100V line through external screw terminals.

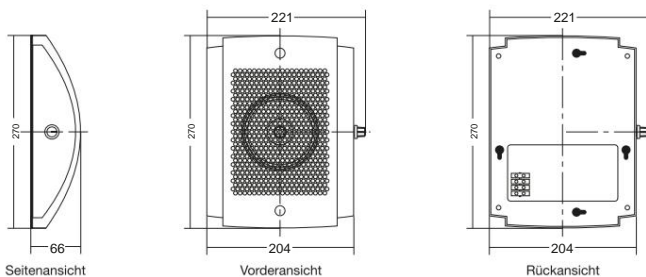

Model names (with closed back panel)

Design speaker 6W, with 100V transmission and reverse... .BCR-006


Design speaker 10W, with 100V transmission and return... .BCR-010

Models with built-in controller:

These cabinet speakers are also available with a built-in volume control.

The controller is mounted on the side and can be operated using the already mounted rotary knob.

*

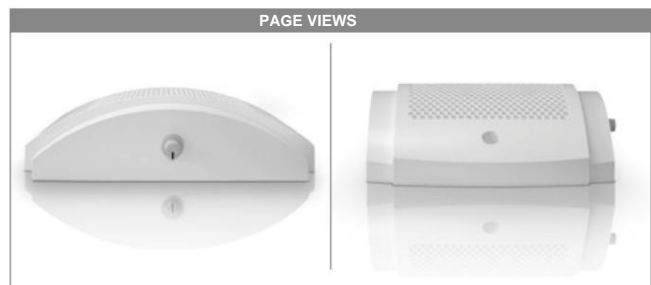

Technical data	BCR-006 (R)	BCR-010 (R)
Nominal load capacity (program power)	6 (15) W	10 (15) W
Adjustments at 100V (in watts)	6 – 3 – 1.5 W	10 – 5 – 2.5 W
frequency range (±10dB)	150 – 20,000 Hz	150 – 20,000 Hz
sound pressure at 1W/1m	94 dB	94.5 dB
sound pressure SPL Pmax/1m	103 dB @1.3kHz	105 dB @1.3kHz
Beam angle (-6dB) 1/4/8 kHz	180°/ 70°/ 40°	180°/ 60°/ 50°
Speaker Ø (mm) and impedance 130/ 8 Ohm		130/ 8 Ohm
External dimensions HxWxD (mm)	270 x 204 (221) x 66	270 x 204 (221) x 66
Weight (kg)	about 1.1	about 1.1

Model names (with closed back panel)

Design speaker 6W, 100V trans., rear, controller. **BCR-006R**

Design speaker 10W, 100V trans., rear, controller. **BCR-010R**