



Guppy PRO F-146

Description

1394b camera with ICX267 - attractive price



The Guppy PRO F-146B/C is a 1394b camera with Sony's ICX267 CCD sensor. At full resolution, it runs 17 fps. Guppy PRO cameras have an ultra-compact, robust metal housing and a very attractive price.

- Sony ICX267 CCD sensor
- Trigger
 - Programmable, trigger level control, single trigger, bulk trigger, programmable trigger delay
- Options
 - Various IR cut/pass filters
 - White medical housing

Specifications

Guppy PRO		F-146	
Interface	IEEE 1394b - 800 Mb/s, 1 port		
Resolution	1388 x 1038		
Sensor	Sony ICX267		
Type	CCD Progressive		
Sensor Size	Type 1/2		
Cell size	4.65 µm		
Lens mount	C		
Max frame rate at full resolution	17 fps		
A/D	12 bit		
On-board FIFO	0 MB		
Output			
Bit depth	8-12 bit		
Mono modes	8/12/16		
Color modes YUV	411/422		
Color modes RGB	RGB8		
Raw modes	8/12/16		
General purpose inputs/outputs (GPIOs)			
TTL I/Os	0		
Opto-coupled I/Os	1/3		
RS-232	0		
Power/Mass/Dimensions/Regulations			
Power requirements (DC)	8 V - 36 V		
Power consumption (12 V)	3 W		
Mass	80 g		
Body Dimensions (L x W x H in mm)	44.8 x 29 x 29 mm incl. connectors		
Regulations	CE, FCC Class B, RoHS		

[Download technical drawing \(click here\)](#)

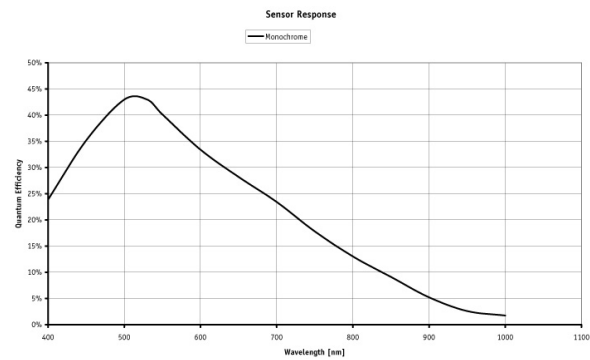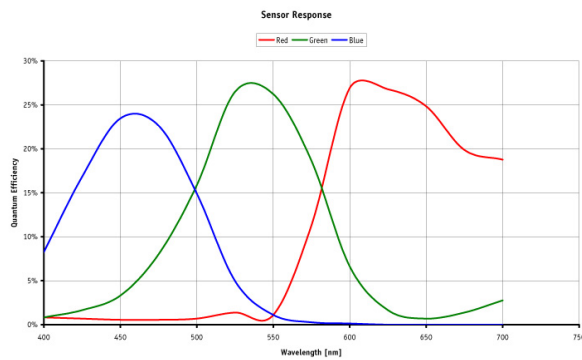

Smart features

- AOI (separate AOI for auto features)
- Programmable LUT, gamma
- Debayering, color correction
- Gain
 - Auto/manual
 - Manual gain control: 0 - 24.4 dB
- Exposure
 - Auto/manual
 - Exposure time: 31 μ s - 67 s
- Binning (2 x 2 b/w)
- Sub-Sampling (2 x 2 b/w)

Applications

The Guppy PRO F-146B/C is a very compact, robust 1394b camera. It suits for several applications:

- Machine vision
- Robotics
- Logistics
- Healthcare and medical imaging
- Pharmaceutical industry
- Multimedia
- Event documentation
- ... and more