




## 900xl

Stereo Audio Power Amplifier (10 Watts per Channel)



The **900xl** is a high-performance power amplifier for line level stereo audio signals. The unit accepts unbalanced audio signals on either two RCA or 3.5mm connectors and delivers a speaker output of 10 watts RMS per channel into a 4Ω load.

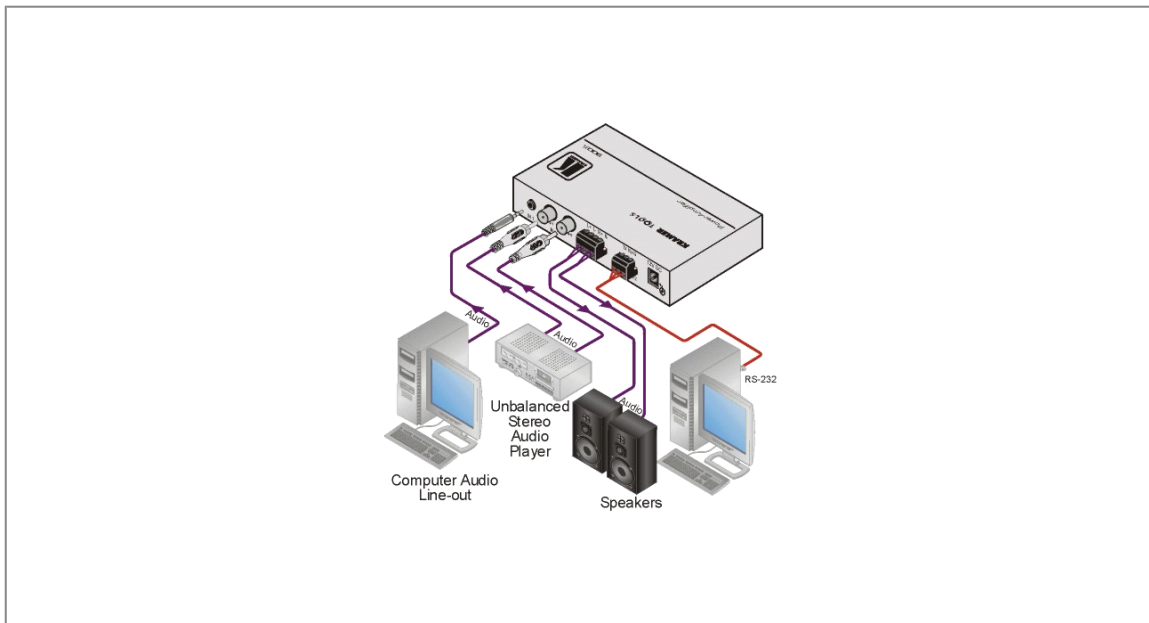



## 900xl

---

### FEATURES

---

- **Input** - 2 RCA and 3.5mm mini jack.
- **Output** - 4-pin terminal block.
- **S/N** - 60dB.
- **Control** - Volume & input selection from front panel & RS-232.
- **Compact Kramer TOOLS™** - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

### TECHNICAL SPECIFICATIONS

---

<b>INPUTS:</b>	1 unbalanced stereo audio on a 3.5mm mini-jack connector; 2 unbalanced stereo audio on RCA connectors.
<b>OUTPUTS:</b>	1 stereo differential speaker output.
<b>OUTPUT POWER:</b>	2x10W (4Ω).
<b>OUTPUT MUSIC POWER:</b>	2x40W (4Ω).
<b>BANDWIDTH (-3dB):</b>	25kHz.
<b>S/N RATIO:</b>	60dB.
<b>CONTROLS:</b>	Gain range: -14.8 to +32dB at high-gain; -21.3 to +20.2dB at low-gain.
<b>COUPLING:</b>	Input: AC; output: DC.
<b>AUDIO THD + NOISE:</b>	2.2%.
<b>AUDIO 2nd HARMONIC:</b>	1.2%.
<b>POWER SOURCE:</b>	12V DC, 2.3A DC.
<b>DIMENSIONS:</b>	12cm x 7.5cm x 2.5cm (4.7" x 3.0" x 1.0") W, D, H.
<b>WEIGHT:</b>	0.2kg (0.4lbs) approx.
<b>ACCESSORIES:</b>	Power supply.
<b>OPTIONS:</b>	RK-3T 19" rack adapter.