




## VA-1 Computer Graphics Video Sync Processor



Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



The **VA-1** is a high-performance sync corrector for computer graphics video signals. The unit re-builds and restores the sync signal to the proper TTL level to travel over long distances.

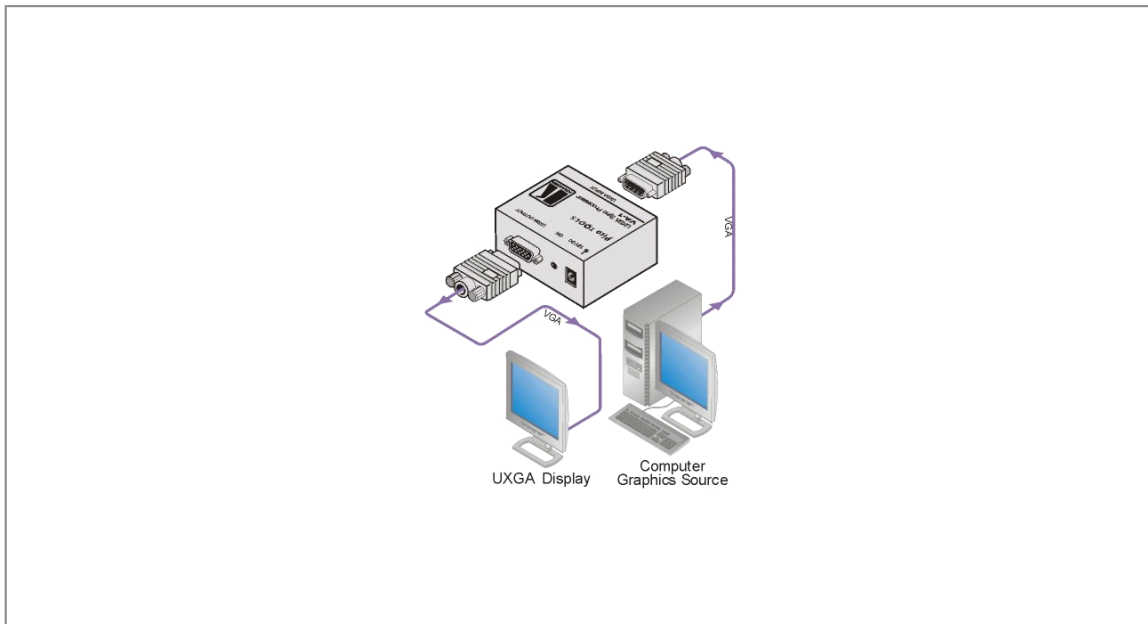



## VA-1

---

### FEATURES

---

- Resolution - Up to UXGA.
- HDTV Compatible.
- Ultra Compact Pico TOOLS™ - 4 units can be rack mounted side-by-side in a 1U rack space with the optional RK-4PT rack adapter.

### TECHNICAL SPECIFICATIONS

---

INPUT:	1 XGA on a 15-pin HD connector.
OUTPUT:	1 XGA on a 15-pin HD connector.
MAX. OUTPUT LEVEL:	5Vpp video syncs.
BANDWIDTH (-3dB):	680MHz.
DIFF. GAIN:	0.03%.
DIFF. PHASE:	0.03%.
K-FACTOR:	<0.1%.
S/N RATIO:	73dB @5MHz.
COUPLING:	DC.
POWER SOURCE:	12V DC, 21mA, fuse: 200mA.
DIMENSIONS:	6.2cm x 5.2cm x 2.4cm (2.4" x 2.1" x 1") W, D, H.
WEIGHT:	0.14kg (0.3lbs).
ACCESSORIES:	12V DC power supply, 19-inch rack adapters.
OPTIONS:	RK-4PT 19" rack adapter.