




## VS-81HDxI

8x1:2 3G HD-SDI Switcher



The **VS-81HDxI** is a high-performance switcher for 3G HD-SDI video signals. The unit switches any one of the eight inputs to two identical outputs.

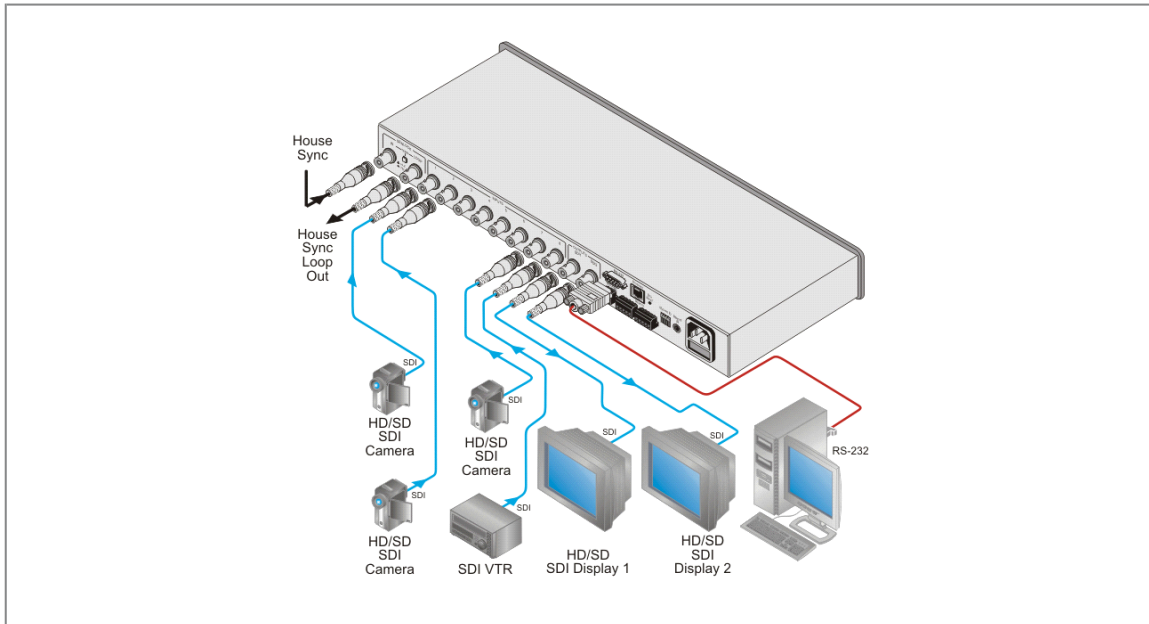



## VS-81HDxl

---

### FEATURES

---

- Max. Data Rate - 2.97Gbps.
- HDTV Compatible.
- Multi-Standard Operation - SDI (SMPTE 259M/344M), HD-SDI (SMPTE 292M) & 3G HD-SDI (SMPTE 424M).
- Kramer Equalization & re-Klocking™ Technology - Rebuilds the digital signal to travel longer distances.
- Active Input Type™ Reporting - The unit lights the selected input LED in green for SD-SDI and in blue when the signal is HD-SDI.
- Analog Sync Type - Bi-level and tri-level sync.
- OFF Button - Disconnects all inputs at once.
- Flexible Control Options - Front panel, RS-232 (K-Router™ Windows®-based software is included), RS-485, Ethernet, contact closure & IR remote (included).
- Vertical Interval Switching - SMPTE RP-168.
- Front Panel Control Lockout.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

### TECHNICAL SPECIFICATIONS

---

|                    |  |
|--------------------|--|
| INPUTS:            | 8 SDI SMPTE-259M, 292M, 344M, 424M serial video, 75Ω on BNC connectors; 1 genlock 75Ω/Hi-Z on looping BNC connector, bi-level, tri-level inputs.                         |
| OUTPUTS:           | 2 identical equalized and reclocked SMPTE-259M, 292M, 344M, 424M outputs 75Ω on BNC connectors; 1 genlock 75Ω/Hi-Z on looping BNC connector, bi-level, tri-level inputs. |
| MAX. OUTPUT LEVEL: | 800mVpp/75Ω.   |
| JITTER:            | Better than 0.2UI.   |
| DATA RATE:         | Up to 2.97Gbps.  |
| CONTROLS:          | Front panel, RS-232; RS 485, Ethernet, infrared remote, contact closure and panel lock.  |
| POWER SOURCE:      | Universal, 100-240V AC, 50/60Hz 22VA.  |
| DIMENSIONS:        | 19" x 7" x 1U W, D, H, rack mountable.   |
| WEIGHT:            | 1.5kg (3.3lbs) approx.   |
| ACCESSORIES:       | Power cord, null-modem adapter, rack "ears".   |
| OPTIONS:           | External remote IR receiver cable.   |