



SWITZERLAND

Audio Bauer Pro AG  
Bernerstrasse-Nord 182, CH-8064 Zürich, Switzerland  
Phone: +41 44 432 32 30, Fax: +41 44 432 65 58  
Web: www.voicetechnologies.net  
Email: info@audio-bauerpro.ch

## VT700 Lightweight Headworn



### VT700 Lightweight Headworn

Designed to fit any head contour and to free performers to focus on their performance! Ideal for event production, public speaking, theatre and broadcast studio operations.

The VT700 headworn is lightweight, the flexible gooseneck enables the user to position the microphone for optimum sound and gain before feedback and is very comfortable and unobtrusive. A perspiration drip ring on the gooseneck ensures the microphone capsule stays dry at all times. The cable runs neatly behind the neck for maximum concealment. The headband is highly resistant to corrosion and is easy to clean.


The VT700 exhibits an extended frequency response and an omni-directional polar pattern for outstanding clarity and natural sound with no proximity build-up.

### VT700 Specifications:

Generating Element:	Electret Condenser
Polar Pattern:	Omni-Directional
Frequency Range:	50Hz- 18 kHz
Sensitivity (@ 1kHz):	-33dB re 1V/Pascal (22mV/Pa)
Noise Level:	27dB "A" weighted
Max. Input SPL:	115dB
Impedance:	2.8 to 6.8 kOhms, nominal 4.4 kOhms
Bias/+VDC:	1.5V to 9.0V (max.)
Dynamic Range:	88dB
Signal Noise Ratio:	67dB @94dB SPL
Color:	black or beige
Cable:	Length 1.5m Ø 2mm
Weight:	17g (without cable/connector)

Wiring Configuration (3-wire):	red: "+"
	transparent: signal
	copper: ground
Wiring Configuration (2-wire)	red + transparent: signal +VDC
	copper: ground

Frequency Response:

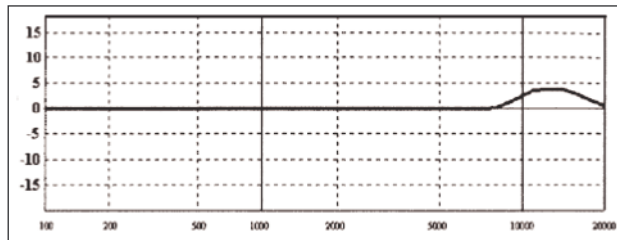

### Accessories for VT700 Lightweight Headworn - for more accessories visit [www.voicetechnologies.net](http://www.voicetechnologies.net)

